

A Survey of Factors Influencing Network Lifetime in Delay Tolerant Network

D. Jyothi Preshiya^{1*} and C. D. Suriyakala²

¹Department of ECE, Sathyabama University, Chennai - 600 119,
Tamil Nadu, India; preshiya@gmail.com

²ECE Department, Sree Narayana Gurukulam College of Engineering,
Ernakulam - 682 311, Kerala, India

Abstract

To what extent a wireless communication gadget can chip away at a single charge of a rechargeable battery obtains the importance. Capacity-wise, disposable batteries are superior to the rechargeable batteries. There are numerous ways utilized with which the battery life can be augmented. At the same time, identifying the cause of battery energy utilization boosts the researchers to design and develop protocols, methods and techniques to minimize the consumption of energy by which lifetime of the network could be extended. This paper investigates the sources and factors that lessen the network lifetime. The scope of this paper has been narrowed down to Delay Tolerant Network since this field of research has attracted a great deal of attention by the researchers mostly due to its challenging characteristic qualities. No promising connectivity, high mobility, indefinite node mobility patterns, energy and storage exhaustion comprise a few of the potential issues that one may confront in a DTN environment which in turn eat-off bandwidth and energy for the data delivery from the Source to the Destination.

Keywords: Ad Hoc Network, Delay Tolerant Network, Energy Efficiency, MAC Layer, Network Layer, Network Life Time

1. Introduction

Green networking¹⁻⁵ is a term leads to optimize and upgrade networking or make the communication more effective with any process that ultimately reduces energy consumption. The issue of green networking has numerous imperative applications, especially as energy gets to be more concern and people become more aware of the unconstructive impacts of energy consumption and so Green networking grabs the attention of the researchers now-a-days. This paper depicts the sources reducing the Network life-time in Delay Tolerant Network. Understanding the importance of the necessity

of reduced energy consumption, we have put forward the study of the sources that consumes energy unfruitful.

Delay Tolerant Network (DTN)⁶⁻¹⁰ is described as a network with frequent intermittent connections, disruptions and experience long delayed data delivery because of nodal mobility, sparsely deployed nodes, node failures, and so on. But, the nodal movement has been utilized for the data communication in such networks which is referred as Store-Carry and Forward¹¹⁻¹². Before the study of the factors of energy consumption, let us first consolidate the applications and the requirement for energy management schemes for such scenarios. Figure 1 shows one of the scenarios where Mobile Ad Hoc Network is used which experience the delay.

*Author for correspondence

2. DTN Applications

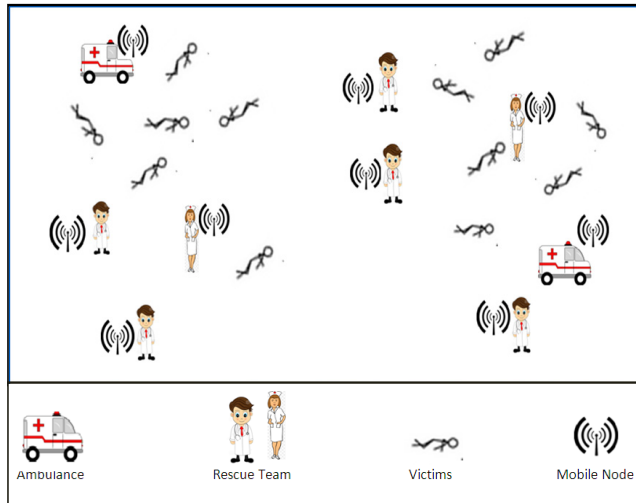


Figure 1. Delay/Disruption Tolerant Network-Emergency Rescue Scenario.

2.1 DTN for Maritime and Underwater Sensor Networks

Transmitting Wireless information through the ocean is one of the recent technologies for the development of future ocean-monitoring systems and sensor networks. Some of the applications of Underwater Sensor Networks (USN)¹³⁻¹⁸ include sensing oil industry, aquaculture, prediction of natural disturbances, climatic condition recording, pollution control, undersea monitoring and exploration, disaster prevention and study of marine life. One of the major issues in the design and development of underwater communication protocols is the energy constraint since frequent change of batteries is complicated and costlier and so in need of energy management schemes which save superfluous energy consumption. To enhance the reliability in USN, multiple-path communications together with Forward Error Correction (FEC)¹⁹ can be carried out. But reliability can be achieved at the cost of multiple paths, which in turn becomes a crucial factor for overall network energy consumption²⁰.

2.2 DTN in Space

DTN technology offers yet another way for profoundly focused on communications in space²¹⁻²⁵ environments, particularly those with frequent connection disruptions and long link delays in deep space missions. The protocols

designed for DTN faces the communication issues and challenges like long link delay, very slow communication links, intermittent connections and availability of limited resources.

2.3 DTN in Emergency Response

Amid a disaster, situational awareness and responsiveness are a standout amongst the most important needs to minimize injury and death toll. Ad Hoc Networks helps in providing information during Emergency Scenarios²⁶⁻³³. DTN affords information to picture and to response the disaster site, the status of the disaster location and people, victim's medical information, need of the victims and to keep up communication with disaster rescue teams. The issues and challenges forced on the protocols developed for such network scenario are intermittent connectivity; congestion due to lot of repetitive data, limited network and device resources, device and link failures, and the sharing of individual gadgets makes security and protection threats. Information send from such scenarios ought to be reliable and comprehensive to make knowledgeable and prerequisite decisions.

2.4 DTN in Mines

Physical movement of people and equipment's inside a mine is largely predictable and periodic³⁴. There are just about four thousand operating mines around the world and its existence relies upon the availability of the ore and may differ from a few years to several years. Inside the mines there exists tens to thousands of mining equipment's along with the workforce in the mines. Hence, exchange of data and information is required inside the mine for operations and monitoring which requires store-carry and forward of data with the help of intermediate nodes. The protocols designed for this application need to forward the data on-time with limited resources.

2.5 DTN in Forestry

Environmental monitoring in forestry³⁵ requires measurement of temperature, chemical contamination in the soil, intensity of natural lighting, fire hazards, radiation levels and air pressure. This information is collected by the wireless sensors randomly deployed in forestry. Sensor nodes in such environment experience long delay for encountering each other due to the nature of the location, natural harshness, heavy rainfall, fog and the movement

of the wildlife. Sensing the information and forwarding the data are challenging in forestry. So the Sensor nodes and the protocols used are designed to withstand all the limitations in such applications.

Summarizing the above applications, extended Network Life-time is essential to facilitate resourceful data communication. In the following sections, we discuss the sources of energy consumption in DTN and the existing protocols.

3. Sources for Energy Consumption in DTN

3.1 Idle Listening

For an intermittently connected ad hoc network, time interval between the encounter of nodes are generally much larger than contact durations, which show that the nodes spend most part of their time in the idle listening mode rather than sending or receiving the information. In distributed network like Ad Hoc Network, centralized power saving strategies are also difficult. Experimental studies in³⁶ demonstrate that power consumption by an idle listening mode is more or less equal to the power consumed in a receiving mode. Analysis show that more than around 95 percent of the total energy is devoured by the idle listening mode in searching for neighbors. Energy is consumed not only in idle listening but also in several signaling activities³⁷.

3.2 Data Replication

In order to improve the data delivery probability, the majority of the routing protocols for DTN repeat transmitting the message duplicates³⁸⁻⁴⁴. The first algorithm which is developed for intermittent network is epidemic routing⁴⁵⁻⁴⁷ in which packets that arrive at the intermediate nodes are forwarded to all encountering neighbors and this continues until the data reaches the destination or the time-to-live expires for the data. In spite of the fact that flooding-based scheme⁴⁸⁻⁴⁹ can attain high delivery probability; it squanders much energy in the networks. Superfluous data transmission introduces flooding of messages that results in nodal buffer overflow which in turn creates congestion and affects the entire network. As a result, an energy-efficient forwarding algorithm which minimizes the number of data replication is recom-

mended for DTN that influence the energy consumption as well as impact the overall network throughput also.

3.3 Packet Retransmission

Reliability is one of the main concerns in delay tolerant ad hoc network for the reason that of its characteristics like intermittency, long delay link, route failures etc. Reliable data transmission is achieved by packet retransmission^{50,51} if it is concluded that the data is lost. It requires attention to the network and communication thereby reducing the number of retransmissions.

3.4 Fixed Transmit Power

Data transmitted from one node to the other with fixed transmit power consumes more energy. Since transmission power is directly proportional to the distance between the nodes, dynamic power control⁵² is required to minimize the power consumption when the distance between the nodes is less.

4. Energy Efficient Routing Protocols for DTN

⁵³The authors incorporate add-on techniques to improve the Epidemic Routing Protocol (ERP) in order to extend the lifetime of Delay Tolerant Mobile Sensor Network (DTMSN)⁵⁴⁻⁵⁶. After contemplating ERP with many variations to augment the network lifetime, three schemes viz., LT (Limiting the Time allowed for propagation) scheme, LC (Limiting the number of Copies) scheme and LE (Limiting the generation of the copies to the nodes with large residual Energy) scheme are presented. These schemes attempt to control the number of the duplicate copies forwarded. They extensively maximize the lifetime of DTMSN by shifting the control of creating the number of duplicate copies to the nodes with larger residual energy thereby diminishing the energy consumption for every node by controlling the packet flow. Boosting the network lifetime is not much equivalent to minimizing the number of the duplicate copies. When reliable data delivery is required, random minimization of the duplication of the packet copies is not recommended. In such cases, a node may transmit only to the nodes with the larger delivery priority towards the destination which is based on the destination node encounter history, mobility

pattern and other information regarding the network status and it is carried out by the control algorithms. In this paper, the authors concluded that ERP with LE scheme shows better performance in terms of extending network life time.

Authors⁵⁷, explains a new strategy in forwarding the multiple copies of data with the criteria of minimum energy consumption. If a node forwards data copies to all its encountered nodes, its batteries will be spent rapidly. An energy efficient n-epidemic routing protocol is proposed, keeping in mind the goal is to reach multiple intermediate nodes with less number of data transmissions. For this, it is better to transmit only when the number of neighbors inside the communication ranges reaching a certain threshold 'n'. Choosing the threshold 'n' is significant and it is the key step in n-epidemic routing algorithm. Suppose if n is large and the likelihood of a node having such a large number of neighbors is low then chances of the packet sent out is minimum which in turn reduces the probability of receiving the packet by the destination. Conversely, nodes have lots of opportunities to forward a packet if 'n' is small and so the batteries energy will be drained rapidly.

The authors proposed an Energy-efficient Routing algorithm Based on Cross-layer design (ERBC)⁵⁸. In DTN, same transmit power is consumed for exchanging data between mobile nodes which is an energy-consuming method and requires some power control mechanisms to make the routing effective. Low is the transmit power; more is the chance of missing the data delivery. Alternatively, high transmit power is wasteful of energy. As an alternative of utilizing fixed transmit power, ERBC predicts the distance between the mobile nodes based on the information acquired from RSSI technology⁵⁹⁻⁶¹ and using cross-layer design^{62,63} selects the minimum transmission power level to exchange the data packets. In order to enhance the packet delivery ratio ERBC follows the method of broadcasting partial data packets. Simulation results show that ERBC can decrease 37 percent for per-bit energy consumption than the epidemic routing protocol. It predicts the distance between two nodes reasonably by the RSSI techniques then selects the minimal transmit power level to transmit the packets.

Authors⁶⁴ proposed a methodology named Distance and Energy-Aware Routing protocol (DER) to reduce the energy consumption cutting down the replicas based on the details of distance between the sensor nodes and the

sink nodes in the network and the residual energies of each sensor nodes. Also DER calculates the data delivery probability between the nodes based on the frequency of encounters of sensor nodes with the sink node and its mobility direction.

In⁶⁵, the Authors proposed a Look-ahead probabilistic Energy Aware [LaHEA] routing strategy for DTN which chooses the forwarding node based on high delivery probability value that is higher than the predictability threshold. Also for Improvising energy efficient data forwarding, available energy of the receiver node ought to be known to the sending node and it is estimated by an energy estimation module. Forwarding to the node which lacks energy is superfluous since the battery drain out and fails in delivering the data to the destination thereby reduces network throughput and reliability.

5. Energy Efficient MAC protocols for DTN

Power saving mechanisms for Ad Hoc Networks^{66,67} developed so far can be categorized into three types and are on-demand wakeup⁶⁸, scheduled wakeup, and asynchronous wakeup mechanisms⁶⁹. The major sources of superfluous energy consumption considered are idle listening and the mechanisms proposed deal with minimizing the time duration of idle listening. One of the techniques for on-demand wake up mechanisms is the usage of additional secondary low power radio module to wake-up the mobile nodes radios when the data exchange is desired. For scheduled wakeup mechanisms, all the nodes in the network awaken at synchronized intervals in order to communicate with each other. As an initiative authors designed IEEE 802.11 PSM^{70,71} a synchronous power saving protocol for single hop networks in which wireless devices in the network are maintained with synchronized clocks, periodically turn on and off their radio to minimize energy consumption. Concentration on Power Saving Mechanism in MAC Layer is said to be duty cycling⁷²⁻⁷⁴ or a sleep scheduling⁷⁵. But achieving synchronization is challenging in ad hoc networks since the nodes join or leave the network at any time. Cooperative coordination among the nodes minimizes the energy consumption. Asynchronous wakeup mechanisms do not necessitate global clock synchronization⁷⁶⁻⁷⁸ and so duty cycling is predefined in every node so as to guarantee minimum of one overlapping wake up schedule among

Table 1. Comparison of Energy Efficient Protocols for DTN

Protocol	Network Type/Layer	Factors considered as sources of energy consuming	Approach	Parameters Analyzed	performance
ERP+ LE scheme	DTMSN/ Network Layer	Data Replication	1. Minimizing the number of copies. 2. Copies are generated by the nodes which has large residual energy	Delivery Probability, Normalized energy consumption	Life time of the network is maximized
EE n-epidemic	DTN/ Network Layer	Data Replication	Transmit the data only when the Number of neighbors reaching a certain threshold.	Delivery ratio, Average Delivery Performance	Increase the delivery performance of basic routing protocol by 434%
ERBC	DTN/ Network Layer	Fixed Transmit Power	Dynamically chooses the transmit power using both Cross Layer Design and RSSI Technology	Per-bit energy consumption, Network Lifetime, Success Rate	Reduce 37% for per bit energy consumption than basic routing protocol
DER	DTMSN/ Network Layer	Data Replication	Minimizes the number of replica based on the distance between the sensor node and the sink node and the Residual energy of the sensor node.	Delivery Rate, Delay, Network Lifetime	Performs better at the cost of lower traffic overhead and low energy consumption.
LaHEA	DTN/ Network Layer	Data Replication	Minimizes Data Replication based on Data Probability Value and the remaining energy of the current connected node.	End-to-End Delay, Energy Consumption, Delivery Probability	Reduces the number of retransmissions and Message drop and increases the delivery ratio.
EACDS/ MACDS	DTN/MAC Layer	Idle Listening	Adaptive Cyclic Difference Set System designed with multiple power saving levels	Delivery Ratio, Delivery Delay, Normalized Energy Consumption, Energy Consumption per Frame.	Reduces the energy consumption up to 35 percent- compared with power management protocols. Up to 90 percent – compared with without power management protocols.
EQ-MAC	DTMSN/ MAC Layer	Idle Listening	Uses Minimal Probe Frame, Dynamic Queue Management and a transfer mechanism initiated by the target receiver.	Throughput, Packet Drop Probability, Mean Packet Delay, Energy	Achieves 46% decrease in packet drop probability, 79% increase in system throughput, 25 % in mean packet delay

the nodes in the network where global synchronization is impractical to implement.

In⁷⁹ the authors focused on the power management schemes for DTN, and proposed asynchronous energy efficient clock-based sleep scheduling protocols. On the basis of hierarchical arrangements of Cyclic Difference Sets⁸⁰ and Rotational Closure Property, they have proposed two energy efficient adaptive asynchronous sleep scheduling protocols and discussed the implementation issues in maximizing energy efficiency in frame structure and neighbor discovery. First is the Exponential Adaptive Cyclic Difference Set (EACDS), a difference set called an initial set at power saving level 1(P1) is scaled by another difference set called an exponential set to create a hierarchical set with power saving level 2(P2). The hierarchical set can be scaled again with Exponential set to create yet a higher level hierarchical set P3 which provides higher energy efficiency than P2 at the cost of lower contact opportunities. Second is the Multiplicative Adaptive Cyclic Difference Set (MACDS) in which a multiplier set is used instead of an exponential set. Active Ratio and Neighbor Sensitivity are the parameters considered for the analysis of the proposed mechanisms.

In paper⁸¹, the author proposes an energy-efficient MAC protocol for Delay Tolerant Mobile Sensor Network using dynamic queue management (EQ-MAC) for saving power consumption and data queue management. EQ-MAC protocol effectively minimizes the untargeted data transfer thereby increasing the successful data transmission in a timely manner. EQ-MAC protocol performs the best when compared with traditional MAC protocols in terms of energy consumption, mean packet delay, packet drop probability and throughput in Delay/Disruption Tolerant Network. Table 1 gives the comparison between the existing energy efficient protocols in DTN.

6. Open Research Issues

Maximizing Network Lifetime^{82,83} and Minimizing Energy consumption are the important issues to be considered in Delay Tolerant ad hoc networks since such network experiences energy loss due to long delays and listening to the network. Energy of a node gets consumed during communication, computation and while sending beacon signals. Initiatives have to be taken in order to

reduce energy consumption in all these aspects. Some of the research issues regarding the minimization of energy consumption are discussed in this section.

- Protocol design in Cross Layer approach reduces the power consumption considerably since it deals with multiple issues related to multiple layers.
- Analyzing the sources which consume energy while processing the data and finding the methods of reducing the superfluous consumption.
- Minimizing the beaconing signal without missing the encounter opportunity.
- Analyzing and avoiding unnecessary retransmission of data but without losing the reliability of the network.

7. References

1. Bianzino AP, Chaudet C, Rossi D, Rougier J. A survey of green networking research. *IEEE Communications Surveys and Tutorials*. 2012; 14(1):3–20.
2. Chen Y, Zhang S, Xu S, Li GY. Fundamental trade-offs on green wireless networks. *IEEE Communications Magazine*. 2011; 49(6):30–7.
3. Han C, Harrold T, Armour S, Krikidis I, Videv S, Grant PM, Harald H, et al. Green radio: Radio techniques to enable energy-efficient wireless networks. *IEEE Communications Magazine*. 2011; 49(6):46–4.
4. Chen T, Yang Y, Zhang H, Kim H, Horneman K. Network energy saving technologies for green wireless access networks. *IEEE Wireless Communications*. 2011; 18 (5):30–8.
5. Yu FR, Zhang X, Leung VCM. *Green Communications and Networking*. CRC Press; 2012.
6. Kevin JF. A delay-tolerant network architecture for challenged internets. *Proceedings of the ACM 2003 Conference on Applications, Technologies, Architectures and Protocols for Computer Communications*; 2003. p. 27–34.
7. Demmer MJ. A delay tolerant networking and system architecture for developing regions [PhD dissertation]. Berkeley: University of California; 2008.
8. Cerf V, Burleigh S, Hooke A, Torgerson L, Durst R, Scott K, Fall K, Weiss H. Delay-tolerant networking architecture. RFC 4838; 2007 Apr.
9. Jain S, Fall K, Patra R. Routing in a delay tolerant network. *ACM*. 2004; 34(4).
10. Zhang Z. Routing in intermittently connected mobile ad hoc networks and delay tolerant networks: Overview and challenges. *IEEE Communications Surveys and Tutorials*. 2006; 8(1):24–37.

11. Pelusi L, Passarella A, Conti M. Opportunistic networking: Data forwarding in disconnected mobile ad hoc networks. *IEEE Communications Magazine*. 2006; 44(11):134–41.
12. Heidemann J, Stojanovic M, Zorzi M. Underwater sensor networks: Applications, advances and challenges. *Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences*. 2012; 370(1958):158–75.
13. Vasilescu I, Kotay K, Rus D, Dunbabin M, Corke P. Data collection, storage and retrieval with an underwater sensor network. *Proceedings of the ACM 3rd International Conference on Embedded Networked Sensor System*; 2005. p. 154–65.
14. Vasilescu I, Kotay K, Rus D, Dunbabin M, Corke P, Detweiler C, Rus D. Aqua Nodes: An underwater sensor network. *Proceedings of the Second ACM Workshop on Underwater Networks*; 2007. p. 85–8.
15. Heidemann J, Ye W, Wills J, Syed A, Li Y. Research challenges and applications for underwater sensor networking. *IEEE Wireless Communications and Networking Conference (WCNC 2006)*; 2006. p. 228–35.
16. Yick J, Mukherjee B, Ghosal D. Wireless sensor network survey. *Computer Networks*. 2008; 52(12):2292–30.
17. Akyildiz IF, Vuran MC. Wireless underwater sensor networks. *Wireless Sensor Networks*. 2010:399–42.
18. Xu J, Li K, Min G. Reliable and energy-efficient multipath communications in underwater sensor networks. *IEEE Transactions on Parallel and Distributed Systems*. 2012; 23(7):1326–35.
19. Xie Peng, Cui J-H. R-MAC: An energy-efficient MAC protocol for underwater sensor networks. *IEEE International Conference on Wireless Algorithms, Systems and Applications (WASA'2007)*; 2007. p. 187–98.
20. Wang R, Wu X, Wang T, Taleb T. Delay Tolerant Networking (DTN) protocols for space communications. *Delay Tolerant Networks: Protocols and Applications*. 2010.
21. Davis Faith A, Marquart JK, Menke G. Benefits of delay tolerant networking for earth science missions. *Aerospace Conference*; 2012. p. 1–11.
22. Farrell S, Cahill V. Security considerations in space and delay tolerant networks. *Second IEEE International Conference on Space Mission Challenges for Information Technology (SMC-IT'2006)*; 2006. p. 8.
23. Joshua Schoolcraft, Wilson K. Experimental characterization of space optical communications with disruption-tolerant network protocols. *IEEE International Conference on Space Optical Systems and Applications (ICSOS'2011)*; 2011. p. 248–52.
24. Scenarios R. Requirements for DTN in Space. *CCSDS Draft Green Book*. 2010 Mar.
25. Kannan KF, Gianluca I, Jayanthkumar, Silveira F, Taft N. A Disruption-Tolerant Architecture for Secure and Efficient Disaster Response Communications.
26. Raffelsberger C, Hellwagner H. Overview of hybrid MANET-DTN networking and its potential for emergency response operations. *Electronic Communications of the EASST* 56. 2013.
27. Martin-Campillo A, Crowcroft J, Yoneki E, Marti Ramon. Evaluating opportunistic networks in disaster scenarios. *Journal of Network and Computer Applications*. 2013; 36(2):870–80.
28. George SM, Zhou W, Chenji H, Won M, Lee YO, Pazarloglou A, Stoleru R, Barooah P. Distress Net: A wireless ad hoc and sensor network architecture for situation management in disaster response. *IEEE Communications Magazine*. 2010; 48(3):128–36.
29. Chipara O, Griswold WG, Plymoth AN, Huang R, Liu F, Johansson P, Rao R, Chan T, Buono C. WIISARD: A measurement study of network properties and protocol reliability during an emergency response. *Proceedings of the ACM 10th International Conference on Mobile Systems, Applications and Services*; 2012. p. 407–20.
30. Raffelsberger C, Hellwagner H. A hybrid MANET-DTN routing scheme for emergency response scenarios. *PERCOM Workshops. 2013 IEEE International Conference on Pervasive Computing and Communications Workshops*; 2013. p. 505–10.
31. Uddin MYS, Nicol DM, Abdelzaher TF, Kravets RH. A post-disaster mobility model for delay tolerant networking. *Winter Simulation Conference*; 2009. p. 2785–96.
32. Raffelsberger C, Hellwagner H. Evaluation of MANET routing protocols in a realistic emergency response scenario. *IEEE Proceedings of the Tenth Workshop on Intelligent Solutions in Embedded Systems (WISES'2012)*; 2012. p. 88–92.
33. Ginzboorg P, Karkkainen T, Ruotsalainen A, Andersson M, Ott J. DTN communication in a mine. *2nd Extreme Workshop on Communications*; 2010 Sep.
34. Al-Fagih AE, Hassanein HS. Routing schemes for delay-tolerant networks - An applications perspective: *Technical Report* 588; 2012. p. 1–40.
35. Choi BJ, Shen X. Adaptive asynchronous sleep scheduling protocols for delay tolerant networks. *IEEE Transactions on Mobile Computing*. 2011; 10(9):1283–96.
36. Altman E, Azad AP, Basar T, De Pellegrini F. Combined optimal control of activation and transmission in delay-tolerant networks. *IEEE/ACM Transactions on Networking (TON)*. 2013; 21(2):482–94.
37. Li Yong, Jiang Y, Jin D, Su L, Zeng L, Wu DO. Energy-efficient optimal opportunistic forwarding for delay-tolerant net-

- works. *IEEE Transactions on Vehicular Technology*. 2010; 59(9):4500–12.
38. Zhuo X, Li Q, Gao W, Cao G, Dai Y. Contact duration aware data replication in delay tolerant networks. 19th IEEE International Conference on Network Protocols (ICNP'2011); 2011. p. 236–45.
 39. Wang Y, Wu H. Replication-Based efficient data delivery scheme (RED) for Delay/Fault-Tolerant-Mobile Sensor Network (DFT-MSN). *PerCom Workshops 2006. Fourth Annual IEEE International Conference on Pervasive Computing and Communications Workshops*; 2006. p. 5.
 40. Thompson N, Crepaldi R, Kravets R. Locus: A location-based data overlay for disruption-tolerant networks. *Proceedings of the 5th ACM workshop on Challenged networks*; 2010. p. 47–54.
 41. Li Y, Cao Y, Li S, Jin D, Zeng L. Integrating forwarding and replication in dtn routing: A social network perspective. *VTC Spring. IEEE 73rd Vehicular Technology Conference*; 2011. p. 1–5.
 42. Lin Yunfeng, Li B, Liang B. Efficient network coded data transmissions in disruption tolerant networks. *The IEEE 27th Conference on Computer Communications (INFOCOM'2008)*; 2008.
 43. Ip Y-K, Lau W-C, Yue O-C. Forwarding and replication strategies for DTN with resource constraints. *IEEE 65th Vehicular Technology Conference (VTC'2007)*; 2007. p. 1260–64.
 44. Vahdat A, Becker D. Epidemic routing for partially connected ad hoc networks. *Technical Report CS-200006. Duke University*; 2000.
 45. Zhang X, Neglia G, Kurose J, Towsley D. Performance modeling of epidemic routing. *Computer Networks*. 2007; 5(10):2867–91.
 46. Li Yong, Hui P, Jin D, Su L, Zeng L. Evaluating the impact of social selfishness on the epidemic routing in delay tolerant networks. *IEEE Communications Letters*. 2010; 14(11):1026–8.
 47. Spyropoulos T, Psounis K, Raghavendra CS. Spray and wait: An efficient routing scheme for intermittently connected mobile networks. *Proceedings of the 2005 ACM SIGCOMM Workshop on Delay-Tolerant Networking*; 2005. p. 252–9.
 48. Spyropoulos T, Psounis K, Raghavendra CS. Efficient routing in intermittently connected mobile networks: The single-copy case. *IEEE/ACM Transactions on Networking (TON)*. 2008; 16(1):63–76.
 49. Lacan J, Lochin E. On-the-fly coding to enable full reliability without retransmission. 2008.
 50. Bezirgiannidis N, Tsaoussidis V. Packet size and DTN transport service: Evaluation on a DTN testbed. *IEEE 2010 International Congress on Ultra-Modern Telecommunications and Control Systems and Workshops (ICUMT)*; 2010. p. 1198–05.
 51. Gomez J, Campbell AT, Naghshineh M, Bisdikian C. PARO: Supporting dynamic power controlled routing in wireless ad hoc networks. *Wireless Networks*. 2003; 9(5):443–60.
 52. Chen Z, Yang F, Huang S, Yang W. An energy-aware routing scheme in delay tolerant mobile sensor networking. *Sensors and Transducers*. 2014; 176(8).
 53. Wang Y, Wu H. Delay/Fault-Tolerant Mobile Sensor Network (DFT-MSN): A new paradigm for pervasive information gathering. *IEEE Transactions on Mobile Computing*. 2007; 6 (9):1021–34.
 54. Pathirana PN, Bulusu N, Savkin AV, Jha S. Node localization using mobile robots in delay-tolerant sensor networks. *IEEE Transactions on Mobile Computing*. 2005; 4(3):285–96.
 55. Mascolo C, Musolesi M. SCAR: Context-aware adaptive routing in delay tolerant mobile sensor networks. *Proceedings of the ACM 2006 International Conference on Wireless Communications and Mobile Computing*; 2006. p. 533–8.
 56. Lu X, Hui P. An energy-efficient n-epidemic routing protocol for delay tolerant networks. *NAS 2010. IEEE Fifth International Conference on Networking, Architecture and Storage*; 2010. p. 341–47.
 57. Yao YK, Zheng WX, Ren Z. An energy-efficient routing algorithm for disruption tolerant networks. *Advanced Materials Research*. 2013; 756:3754–9.
 58. Zhou Y, Li H-C. Space localization algorithm based RSSI in wireless sensor networks. *Journal on Communications*. 2009; 30(6):75–9.
 59. Yao Q, Tan S-K, Ge Y, Yeo B-S, Yin Q. An area localization scheme for large wireless sensor networks. *VTC 2005-spring. IEEE 61st Vehicular Technology Conference*; 2005. p. 2835–39.
 60. Yingxi X, Xiang G, Zeyu S, Li C. WSN node localization algorithm design based on RSSI technology. *IEEE 5th International Conference on Intelligent Computation Technology and Automation (ICICTA'2012)*; 2012. p. 556–9.
 61. Shakkottai S, Rappaport TS, Karlsson PC. Cross-layer design for wireless networks. *IEEE Communications Magazine*. 2003; 41(10):74–80.
 62. Madan R, Cui S, Lall S, Goldsmith A. Cross-layer design for lifetime maximization in interference-limited wireless sensor networks. *IEEE Transactions on Wireless Communications*. 2006; 5(11):3142–52.
 63. Mottagina Z, Dabaghipoor S, Ghaffari A. Distance and energy aware routing protocol for delay tolerant mobile sensor networks. *World Applied Sciences Journal*. 2012; 19(1):38–46.

64. Ayub Q, Zahid MSM, Abdullah AH, Rashid S. Look A-Head probabilistic energy-aware routing strategy for delay tolerant network. *Life Science Journal*. 2013; 10(2):1609–14.
65. Tseng Y-C, Hsu C-S, Hsieh T-Y. Power-saving protocols for IEEE 802.11-based multi-hop ad hoc networks. *Computer Networks*. 2003; 43(3):317–37.
66. Jung E-S, Vaidya NH. A power control MAC protocol for ad hoc networks. *Proceedings of the 8th Annual International Conference on ACM Mobile Computing and Networking*; 2002. p. 36–47.
67. Zheng R, Kravets R. On-demand power management for ad hoc networks. *Ad Hoc Networks*. 2005; 3(1):51–68.
68. Paruchuri V, Basavaraju S, Durresi A, Kannan R, Iyengar SS. Random asynchronous wakeup protocol for sensor networks. *IEEE Proceedings of First International Conference on Broadband Networks (BroadNets 2004)*; 2004. p 710–7.
69. Liu M, Liu MT. A power-saving scheduling for IEEE 802.11 mobile ad hoc network. *IEEE 2003 International Conference on Computer Networks and Mobile Computing (ICCNMC'2003)*; 2003. p. 238–45.
70. Singh S, Woo M, Raghavendra CS. Power-aware routing in mobile ad hoc networks. *Proceedings of the 4th Annual ACM/IEEE International Conference on Mobile Computing and Networking*; 1998. p. 181–90.
71. Vigorito CM, Ganesan D, Barto AG. Adaptive control of duty cycling in energy-harvesting wireless sensor networks. *4th Annual IEEE Communications Society Conference on Sensor, Mesh and Ad Hoc Communications and Networks (SECON'07)*; 2007. p. 21–30.
72. Ganeriwal S, Tsigkogiannis I, Shim H, Tsiatsis V, Srivastava MB, Ganesan D. Estimating clock uncertainty for efficient duty-cycling in sensor networks. *IEEE/ACM Transactions on Networking (TON)*. 2009; 17(3):843–56.
73. Landsiedel O, Ghadimi E, Duquennoy S, Johansson M. Low power, low delay: Opportunistic routing meets duty cycling. *2012 ACM/IEEE 11th International Conference on Information Processing in Sensor Networks (IPSN)*; 2012. p. 185–96.
74. Cao Q, Abdelzaher T, He T, Stankovic J. Towards optimal sleep scheduling in sensor networks for rare-event detection. *Proceedings of the IEEE 4th International Symposium on Information Processing in Sensor Networks*; 2005. p. 4.
75. Li Q, Rus D. Global clock synchronization in sensor networks. *IEEE Transactions on Computers*. 2006; 55(2):214–26.
76. Sundararaman B, Buy U, Kshemkalyani AD. Clock synchronization for wireless sensor networks: A survey. *Ad Hoc Networks*. 2005; 3(3):281–23.
77. Sommer P, Wattenhofer R. Gradient clock synchronization in wireless sensor networks. *Proceedings of the 2009 International Conference on Information Processing in Sensor Networks: IEEE Computer Society*; 2009. p. 37–48.
78. Zheng R, Hou JC, Sha L. A synchronous wakeup for ad hoc networks. *Proceedings of the 4th ACM international symposium on Mobile ad hoc networking and computing*; 2003. p. 35–45.
79. Baumert LD. *Cyclic difference sets*. Springer; 1971.
80. Li J, Li Q, Qu Y, Zhao B. An energy-efficient MAC protocol using dynamic queue management for delay-tolerant mobile sensor networks. *Sensors*. 2011; 11(2):1847–64.
81. Shankar T, et al. Implementation of smart sleep mechanism and hybrid data collection technique for maximizing network lifetime in WSN's. *Indian Journal of Science and Technology*. 2015; 8(S9):1–8.
82. Saranya R, Umamakeswari A. Energy aware data aggregation with sink relocation to improve the network lifetime. *Indian Journal of Science and Technology*. 2015; 8(S9):312–7.