

# Current Mode Logic based Semiconductor Laser Driver Design for Optical Communication System

Bhagwan Das\*, M.F.L. Abdullah, Mohd. Shah Nor Shahida and Qadir Bakhsh

Universiti Tun Hussein Onn Malaysia (UTHM); engr.bhagwandas@hotmail.com; faiz@uthm.edu.my; shahida@uthm.edu.my; Qadirquest@gmail.com

## Abstract

In optical communication systems, semiconductor lasers are widely in use as an optical source but the performance of laser are limited due to temperature variation, design incompetency, and power consumption issues. The direct output of semiconductor laser may destroy the additional component attached in the system. In this research, semiconductor laser driver is implemented by utilizing the current mode logic technique to control the output of semiconductor laser. Current Mode Logic (CML) is one of the compatible technique to work integratedly with optical components. CML based design of semiconductor laser driver has achieved the current ranges from 5.6 mA to 6.8 mA and efficiently working up to 10 GHz frequency and consume 75% less power than typically available laser drivers. In future, the semiconductor laser may have implemented using System on Chip (SoC) configuration to make the design more energy efficient, in terms of temperature sensitivity and power consumption.

**Keywords:** Current Mode Logic, Driver Circuits, N-Metal Oxide Semiconductor Transistor, Semiconductor Lasers, Switching Efficiency

## 1. Introduction

In modern society, the advancement in communication systems has increased the amount of data transported enormously. The analog and digital communication techniques have developed the great expansion communication systems. Research is ongoing to resolve the power consumption, commercial cost and other issues for communication system<sup>1,2</sup>. Optical fibers provide the high data rates for long haul communication systems<sup>3</sup>. Transmitter, medium and receiver, are three basic components of an optical communication system, similar to traditional electronic communication systems<sup>4,5</sup>. The optical system is distinct from electronics system that optical system uses light as a carrier<sup>6</sup>. In optical transmitter, laser or Light Emitting Diode (LED) are used as optical source along with circuits to maintain the output of both laser and LED, such laser drivers<sup>7</sup>. In high-speed applications semiconductor lasers are presently, the main light output

source<sup>8</sup>. Laser drivers interface the electronic and optical devices<sup>9-20</sup>.

## 2. Literature Review

In Literature review, brief concepts of semiconductor laser and laser drivers are discussed to clarify the concept, before discussing the problem statement and methodology for its solution. In optical communication systems, the two main sources of optical sources are LED and Laser. Why is the laser preferred over LED?<sup>21</sup>. The reason is that its small size with narrow spectral region with high efficiency<sup>21</sup>. In <sup>22,23</sup>, it was discussed to improve the laser parameters such as; onset and offset current, high quantum productivity with high stability. In Figure 1, the P-I curves for semiconductor laser and LED is shown<sup>24,25</sup>. Figure 1 states that below threshold values (edge value *i*) of current, the laser has minimum power is minor and respond as a Light Emitting Diode (LED) by spontane-

\*Author for correspondence

ous emission. Moreover, above threshold value, the laser responds to stimulated emission and behaves as laser.

## 2.2 Laser Drivers

Laser driver works as a modification device that responds over an input signal modulated by the data pulses<sup>26,27</sup>. In Figure 1, the laser characteristics are demonstrated the laser is dependent on voltage instead of current because the small change in independent parameters will change the laser characteristics and that produces the large variation in current at continuous voltage. To resolve, this issue, the laser drivers are used to protect the large current variations<sup>28-41</sup>. The main challenge to design the laser drivers is that 1-10 mA current with fall and rise time with limited bandwidth is causal for high output cur-

rent. Laser drives is configured in two ways; single ended and open-ended. In single ended, freeloading elements used such as; inductance and other responds with the impedance of the laser driver circuit and reduces power supply ripples from the output signal. In open-ended, the laser is connected to the direct path of the circuit and the current is regulated by lasing region of light and power (P-I curve)<sup>42-44</sup>.

## 3. Problem Statement

The directed interaction of semiconductor laser diode with system ahead is very risky in terms of operation and current variation rather than voltage, produces large fluctuations in output power due to temperature dependency. The implementation of semiconductor laser driver is quite power consumptive.

## 4. Methodology

In this paper, the construction of laser driver is achieved using CML technique, which is for designing the optical components and provides the one-on-one termination for link. The CML techniques provides, the regulated current with elimination of unwanted common mode noisy signals in comparison with other techniques. Another reason for using the CML is that during operation of the symmetrical nature of the signal can avoid cross talk and these signal increases the wide band transmission. The laser driver moderates, the laser signal's serial data and

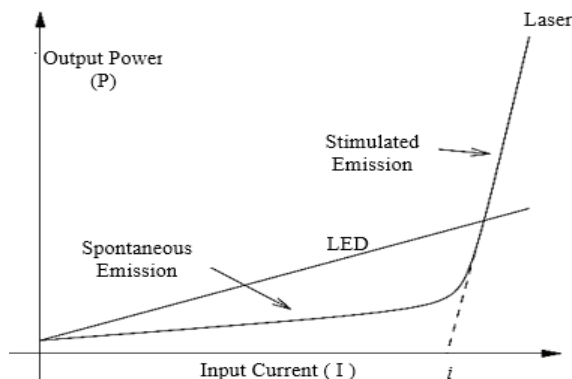


Figure 1. Curve for LED and Laser in terms P-I.

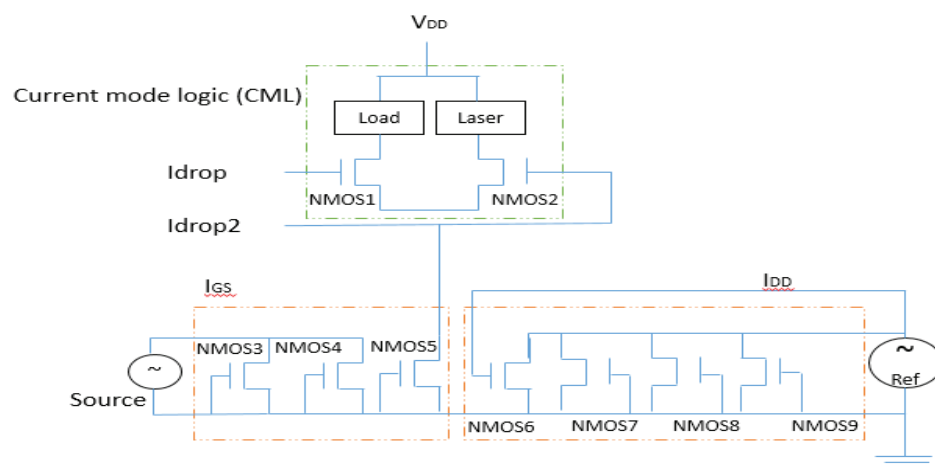


Figure 2. Semiconductor laser driver model.

delivers the DC bias current. The designed laser driver model is demonstrated in Figure 2.

The laser driver model is designed using CML technique that utilizes the N-channel MOSFET transistor in parallel configuration. The CML based laser driver behaves as current switch. The laser driver is placed between the laser and optical fiber or optical system connected to ahead. The laser driver designed using CML is developed using two parallel configured transistors network. The one network is operated using NMOS1 and other network is operated using NMOS2. The current variation is balanced by limiting the current from either NMOS due to change in internal capacitance of NMOS. The selection of NMOS mostly effects the switching speed of semiconductor laser. The laser driver is tested by giving the logic inputs. When logic high or binary 1 is given as an input the NMOS1 is turn-off and this turn-on the NMOS2 and the laser current start flow in the  $I_{drop}$  loop. When logic low or binary zero is given as input, NMOS1 is turn-on and turning off the NMOS2. This configuration produces the combined effect of current regulation due to source and reference voltage. The CML based of laser driver has two outputs; one is connected to laser and other is connected to load. The minimum value of input common-mode level i.e.  $I_{source,CM}$ , is reached, and at this stage the current falls in saturation region. The CML level grasps its maximum value i.e.  $I_{source,CM_{max}}$  is reached and NMOS1 and NMOS2 are in cutoff region, the numerical equation can be calculated for this as in<sup>45</sup>:

$$I_{GS} + (I_{GS} + I_{TH}) \leq I_{source,CM} \leq \min[I_{DD} - Load \frac{I_{SS}}{2} + I_{TH}, I_{DD}] \quad (1)$$

where,  $I_{GS}$  is overdrive current for common mode of two parallel-configured transistors NMOS1 and NMOS2. The over drive current in saturation region is generated with contribution of NMOS3, NMOS4 and NMOS5 and in the cut-off region this overdrive current is zero. Another current type  $I_{DD}$  is contributed due to parallel configuration of NMOS5, NMOS7, NMOS6 and NMOS8. The  $I_G$  saturation yields the  $I_{DD}$  zero in cut-off. The  $I_{GS}$  in cut-off region produces the  $I_{DD}$  maximum current. The reference between both  $I_{GS}$  and  $I_{DD}$  can be calculated using (2)<sup>45</sup>:

$$\Delta I_D = I_{GS} - I_{DD} = \frac{1}{2} \mu_n \Delta I_{SOURCE} \sqrt{\frac{4I_{SOURCE}}{\mu_n}} - \sqrt{\Delta I_{SOURCE}^2} \quad (2)$$

**Table 1.** Design specification for parameters of laser driver

| Design parameters   | Value of the parameters |
|---------------------|-------------------------|
| laser frequency     | 20 GHz                  |
| laser wavelength    | 1550.1 nm               |
| Laser drive voltage | 15.3 V                  |
| Laser drive current | 16 mA                   |
| Laser beam width    | 270 nm                  |
| Laser bandwidth     | 50 GHz                  |


In (2)  $\Delta I_D$  is termed as laser driver current. This laser drive current regulated the current for laser to improve the performance by regulating the current during lasing operation. The developed design of laser driver offers the secure interface between laser and other optical system attached to it. The designed laser driver has the certain limit of regulated current that is 5.6 to 6.8 mA rating and another thing, the heat sink is not provided when temperature is increased. Table 1 shows, the specification used for designing the semiconductor laser drivers that uses different parameters.

Additional to these parameters the room temperature of the laser driver is also important, if the temperature is increased from junction temperature, the device will produce the uncertain output.

## 5. Result and Discussion

The semiconductor laser output is controlled using the designed driver. The CML techniques optimized the laser driver output than traditional counterpart. The CML is specially used to design the optical communication systems' components. The CML specification, such as fast switching capabilities, high frequency operation, high bandwidth and low power consumption makes the CML optimum choice to be used for designing the laser drivers. One important characteristics of CML is that, it provides the temperature stability to electronic circuits. Semiconductor laser are very sensitive to temperature change, the small change in temperature can produce large drift current in laser drivers. Figure 3 shows, semiconductor based laser driver response using ideal and CML technique. Figure 3, the ideal efficiency for semiconductor laser driver should be 100 %, but using CML technique, 75% efficiency is achieved.

Various other laser drivers also produce the efficiency up to 80%, but their switching and temperature

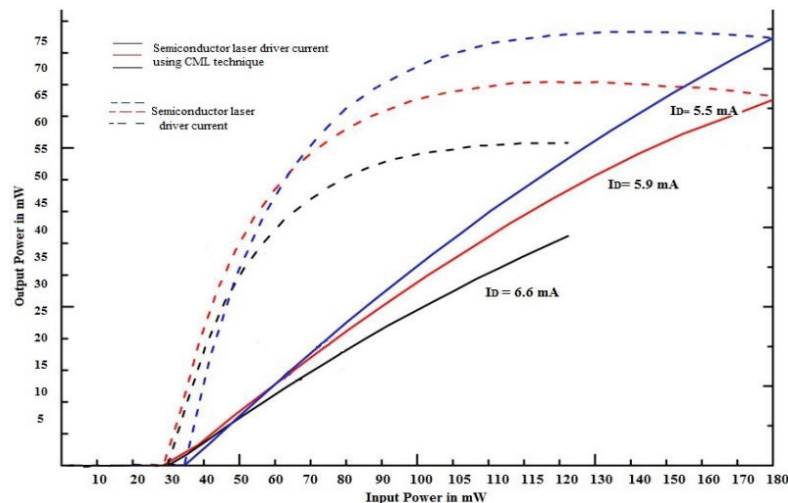

**Figure 3.** Semiconductor Laser driver current curves with and without CML technique.

dependency; make them less feasible to be used. With our designed CML based semiconductor laser driver, the switching is improved up to 89%, then pervious laser drivers available. This CML laser driver can also produce same efficiency even when the devices are producing 6.6 mA, which is maximum current at room temperature of 24-29 °C. Even though, if the room temperatures are increased up to the 40°C, the device is still sustainable for 5.5 mA to 6.3 mA output ratings. However, in other laser driver cases, when driver produces 6.6 mA the temperature rushes up to 100°C. With this designed we have reduced the temperature sensitivity of the laser driver up to 42%, which is quite appreciable, when operating at high current ratings.

## 6. Conclusion

It is concluded that deigned CML based laser driver is controlling the output of semiconductor laser ranges from 5.5 mA to 6.6 mA at the frequency of 10 GHz. The additional feature of the design is that the temperature sensitivity is reduced up to 42%, which is significant reduction than available laser drivers. Furthermore, the switching speed is also enhanced up to 89% than previously available semiconductor laser drivers. This designed can fully protect the devices interfaced with the laser driver ahead. In future, it is still need to enhance the design for more range of current for laser driver, so that drivers can produce fast output than their traditional counterparts. Moreover, our upcoming efforts are

to demonstrate the designed semiconductor laser driver using SoC. This configuration will not save hardware need but also make the device more energy efficient to make optical communication system green. This type of design increases the accuracy to produce required output without damaging any device.

## 7. Acknowledgements

We are thankful to Universiti Tun Hussein Onn Malaysia (UTHM), Malaysia that encourages us to contribute in research. This work is supported by Research Acculturation Collaborative Effort (RACE) grant no. [vot1437] & Postgraduates Incentive Grant (GIPS) [U168].

## 8. References

1. Aznar F, Pueyo S, López C. CMOS receiver front-ends for gigabit short-range optical communications. 3<sup>rd</sup> ed. Springer Science & Business Media: Germany; 2012.
2. Graydon O. Laser diodes: Linewidth reduction. *Nature Photonics*. 2015; 8(9):7–17.
3. Zheng S, Xu Z, Liu J, Fu Q. The Application of electronic communication relay protection in distribution network with distributed generation. *Advanced Materials Research*. 2015:938–42.
4. Turner J, Jessup M. System and method for sensing signal disruption. US Patent 20,140,308,903; 2014.
5. Vasić L, Gao Y, Pun, Mak P, Vai M, Krois I. Effect of transmitter and receiver electrodes configurations on the capacitive intrabody communication channel from 100 kHz to 100

- MHz. The 15th International Conference on Biomedical Engineering; Singapore; 2014, p. 613–16.
6. Erb L, Sundquist S, Shapland E, Walsh G, Shimada J. Optical fiber-fine wire conductor and connectors. US Patent 20,140,318,825; 2014.
7. Ghassemlooy Z, Popoola W, Rajbhandari S. Optical wireless communications: system and channel modelling with Matlab<sup>®</sup>. CRC Press: United Kingdom; 2012.
8. Zorn M. Highly-efficient semiconductor laser diodes. *Laser Technik Journal*. 2015; 12:25–28.
9. Chen Y, Zheng Y, Zhang L. A 5 GHz linear laser diode driver for ROF transmission systems. *Microwave and Optical Technology Letters*. 2015; 57:41–5.
10. Laperle C, O'Sullivan M. Advances in high-speed DACs, ADCs, and DSP for optical coherent transceivers. *Journal of Lightwave Technology*. 2014; 32:629–43.
11. Abdomerovic I, Palmer W, Watson P, Worley R, Raman S. Leveraging Integration: toward efficient linearized all-silicon IC transmitters. *IEEE Microwave Magazine*. 2014; 15:86–96.
12. Anindita B, Chandra K. A temperature modulation circuit for metal oxide semiconductor gas sensor. *Indian Journal of Science and Technology*. 2015 Jun; 8(12):. doi:10.17485/ijst/2015/v8i12/52888.
13. Jeongah H, Laiwon S. Study on the context awareness that the order search system in a distributed computing environment. *Indian Journal of Science and Technology*. 2015 Jul; 8(13):1–8. doi:10.17485/ijst/2015/v8i13/72137.
14. Van der Wee M, Verbrugge S, Tahon M, Colle D, Pickavet M. Evaluation of the techno-economic viability of point-to-point dark fiber access infrastructure in Europe. *Journal of Optical Communications and Networking*. 2014; 6:238–249.
15. Annadurai A, Ravichandran A. Flexural behavior of hybrid fiber reinforced high strength concrete. *Indian Journal of Science and Technology*. 2016 Jan; 9(1):1–5. doi:10.17485/ijst/2016/v9i1/74084.
16. Asaad W, Bellofatto E, Brezzo B, Haymes L, Kapur M, Parker D. Method and infrastructure for cycle-reproducible simulation on large scale digital circuits on a coordinated set of field-programmable gate arrays (FPGAs). U.S. Patent No. 8,640,070; 2014.
17. Bui A, Hauser C. Analytical devices based on light-emitting diodes—a review of the state-of-the-art. *Analytica Chimica Acta*. 2015; 853:46–58.
18. Vijayan K, Raaza A. Novel cluster arrangement energy efficient routing protocol for wireless sensor networks. *Indian Journal of Science and Technology*. 2016 Jan; 9(2):1–9. doi:10.17485/ijst/2016/v9i2/79073.
19. Ananda Kumar S, Ilango P. Data tunnelling in wireless sensor networks: a comparative study. *Indian Journal of Science and Technology*. 2015 Mar; 8(5):472–80. doi:10.17485/ijst/2015/v8i5/61705.
20. Jain A, Vadakkanmaruveedu U, Mitter V, Begin H, Chidambaram P. System and method for idle state optimization in a multi-processor system on a chip. US Patent 20,150,026,495; 2015.
21. Singh P, Sapre D. *Communication Systems*. 2<sup>nd</sup> ed; McGraw-Hill Education: India; 2008.
22. Elliott D. *Ultraviolet laser technology and applications*. 1<sup>st</sup> ed; Academic Press: USA; 2014.
23. Zediker M, Rinzi C, Faircloth B, Koblick Y, Moxley J. High power laser perforating tools and system. U.S. Patent No. 8,701,794; 2014.
24. Heiss D, Higuera-Rodriguez A, Dolores-Calzadilla V, Fiore A, Smit M. Design of an efficient photonic crystal beam laser. 2015 European Conference on Lasers and Electro-Optics - European Quantum Electronics Conference; 2014, p. 1–3.
25. Hiratani T, Atsugi Y, Amemiya T, Nishiyama N, Arai S. Low-power and high-speed operation capabilities of semiconductor membrane lasers—Energy cost limited by Joule heat. 26<sup>th</sup> International Conference on Indium Phosphide and Related Materials (IPRM); 2014, p. 1–2.
26. Crawford D, Richter J, Pickles S, Harwick J, Chandler N. Biphasic laser diode driver and method. U.S. Patent 8,207,711; 2014.
27. Harvey I, Liu H, Beale J. Pulse width modulation control for battery-powered laser device. U.S. Patent Application 14/167,111; 2014.
28. Najib M, Idroas M, Ibrahim M, Ab Ghani M. Imaging of solid particle in air using optical tomography based on CMOS area image sensor. *Indian Journal of Science and Technology*. 2015 Jul; 8(13):1–5. doi:10.17485/ijst/2015/v8i13/70644.
29. Manjula H, Sasikumar M. Current harmonics reduction using hysteresis current controller (hcc) for a wind driven self-excited induction generator drives. *Indian Journal of Science and Technology*. 2015 Jul; 8(13):1–6. doi:10.17485/ijst/2015/v8i13/6033.
30. Eiselt M, Elbers J. Method for tuning a tunable optical transmitter in an optical wdm transmission system and corresponding optical WDM transmission system. U.S. Patent Application No. 14/190,887; 2014.
31. Gibson J. *The communications handbook*. 1<sup>st</sup> ed. CRC press; United Kingdom; 2014.
32. Koenig S. Semiconductor optical amplifiers and mm-wave wireless links for converged access networks. KIT Scientific Publishing; 2014; 14:1–10.
33. Majumdar A. Mitigation techniques for improved Free-Space Optical (FSO) Communications. *Advanced Free Space Optics (FSO)*. 2015; 105–176.
34. Cheng N, Zhou M, Effenberger F. 10 Gbit/s delay modulation using a directly modulated DFB laser for a TWDM PON with converged services. *Journal of Optical Communications and Networking*. 2015; 7:A87–A96.

35. Sriram N, Swaminathan P, Manivannan D. Design and analysis of current mode amplifier as drive electronics for linear voice coil motor. *Indian Journal of Science and Technology*. 2015 Jun; 8(12):1–7. doi: 10.17485/ijst/2015/v8i12/65739.
36. Hemmati H. Near-earth laser communications. 1<sup>st</sup> ed. CRC Press; United Kingdom; 2014.
37. Ganeev A. Interaction of low-power laser radiation with surfaces. *Laser-Surface Interactions*. 2014:23–60.
38. Goll B, Thomson D, Zimmermann L, Porte H, Gardes F, Hu Y. 10Gb/s 5V pp AND 5.6 V pp drivers implemented together with a monolithically integrated silicon modulator in 0.25  $\mu\text{m}$  SiGe: C BiCMOS. *Optics Communications*. 2015; 336:224–34.
39. Dallesasse J, Iannelli J, McGlynn D. Laser optical transmission system with dual modulation. U.S. Patent No. 8,718,484;2014.
40. Tong X. Advanced materials for integrated optical waveguides. 1<sup>st</sup> ed. Springer; Germany; 2014.
41. Ridgway R, Dohrman L, Conway J. Microwave photonics programs at DARPA. *Journal of Lightwave Technology*. 2014; 32:3428–39.
42. Kuehlwein J. Differential laser diode driver apparatus and systems. U.S. Patent No. 8,854,928; 2014.
43. Nedovic N, Kao T. Vertical-cavity surface-emitting laser driver with improved output impedance. U.S. Patent No. 8,861,560; 2014.
44. Zhong C, Dang V, Li M, Maarouf F, Sowlati T. Apparatus to implement symmetric single-ended termination in differential voltage-mode drivers. U.S. Patent No. 8,760,189; 2014.
45. Khanna, V. Insulated gate bipolar transistor IGBT theory and design. 1<sup>st</sup> ed. John Wiley & Sons; New York: United States of America; 2004.