

Thermo-Hydraulic Performance Evaluation Using W-Discrete Rib in Solar Air Heater

Alok Kumar Rohit^{1*} and Atul Ianjewar²

¹AISECT University, Bhopal - 462016, Madhya Pradesh, India; alokrohit2007@gmail.com

²MANIT, Bhopal - 462003, Madhya Pradesh, India; lanjewar_atul@yahoo.com

Abstract

Background/Objective: This paper have more emphasis towards augmentation of solar air duct thermal efficiency. Flow of heat restricted by sub-layer of laminar flow is the major criterion to reduce the thermal efficiency of solar air duct. **Methods/Statistical analysis:** For breaking laminar sub-layer artificial roughness with pattern of W-Discrete geometry has been developed. With all consideration of different previous geometries as a pattern of artificial roughness W-Discrete ribs have best thermo-hydraulic performance. During experimental investigation different parameter taken are Reynolds number of 14000-4000, duct aspect ratio of 8, angle of attack of 45° and relative roughness height of 0.03375. **Findings:** Maximum increment of Nusselt number along with friction factor found in order of 2.79 and 1.98 as compare to smooth plate. Increase in heat transfer enhancement rate is obtained to be 2.35 times for W-discrete up and 2.60 times for W-discrete down rib pattern. Simultaneously with the consideration of smooth plate data results have been evaluated. **Application/Improvements:** Now a day's various solar collection and conversion systems are used like air heaters for crop drying, solar air conditioning and industrial applications. Solar collector is most important component that accounts for major portion of system cost comprising and utilization as a whole.

Keywords: Thermo-Hydraulic Interpretation, W-Discrete Rib, Solar Air Duct

1. Introduction

India has ideal condition for the utilization of sun light. Conversion of thermal energy into heat makes basis of solar air heater. It has been noticed that thermal efficiency of solar air heater corresponds to smooth duct is low that is due to lower value of coefficient of heat transfer between the flowing fluid and absorber plate. In solar air heater generation of laminar sub-layer obstruct the transfer of heat to the flowing air and it makes adverse effect on transfer of heat and thermal performance of solar air duct. The rate heat transfer can be enhanced by developing turbulence to disturb laminar sub-layer of flowing fluid over plate. The development of turbulence must be close to the laminar sub layer to evade extensive friction deprivation. Friction deprivation is possible by maintaining the roughness altitude within the permissible limit and not to exceed beyond the limit. The artificial roughness break laminar sub-layer but simultaneously

friction factor is also increased. Therefore heat transfer rate and pumping power these are two major factors necessary before designing rib roughness geometry. Several investigators worked on continuous ribs that can be further modified by discretization near about the reattachment zone. Discretization help to further create turbulence to break boundary layer development.

2. Studies in Solar Air Heater

¹Investigated on solar air duct with natural ventilation in Single Sided Ventilated Room (SSVR). ²Studied on wire mesh solar air heater. ³Worked on investigation on solar air duct packed bed with low porosity system has been done. ⁴Studied on W-continuous pattern with repeated ribs in rectangular roughened duct assembly. ⁵Studied on rib groove duct. ⁶Worked analysis of light weight cryogenic tank for space vehicles and their effect on heat transfer. ⁷Studied on water silver nano-fluid in a rectangular two-

* Author for correspondence

dimensional micro channel. ⁸Worked on effect of solar irradiance fall on the parabolic dish applications. ⁹Studied on heat transfer applications of synthesis of silver nano-fluid with the help of novel one pot method. ¹⁰Worked on heat exchanger of copper-nickel multi tube assembly along with corrugated copper fins. ¹¹Studied on heat convey rate of viscous liquid with hydro-magnetic oscillatory flow along with a vertical pervious plate in a revolving medium. ¹²Investigated on rectangular plate type heat pipe to find the enhanced heat transfer rate. ¹³Worked on nano-fluid flowing through a straight tube with constant heat flux and their effect on convective heat convey of CuO. ¹⁴Studied on cylinder block shape geometries to analyse heat transfer characteristic and temperature distribution. ¹⁵Worked on (PBPD) Performance Based Plastic Design in order to find yield mechanism and target drift levels and drift due to flexural yielding of the column. ¹⁶Worked on transverse pattern of continuous ribs and also studied performance of combination of transverse and inclined ribs. ¹⁷Continuous inclined pattern of rib. ¹⁸Worked on continuous cross wire pattern. ¹⁹Perform experimental investigation on continuous chamfered ribs. ²⁰Studied on continuous pattern of V-ribs. ²¹Worked on continuous pattern of W-ribs. ²²Investigated on multiple patterns of continuous V-ribs. ²³Worked on groove used with transverse ribs element. ²⁴Investigated on geometry of groove used with chamfered ribs element. ²⁵Worked on arc shaped rib geometry. ²⁶Studied on arc geometry in double form. ²⁷Investigate on V-discontinuous and V-discrete rib. ²⁸Studied on gap provision on inclined ribs pattern. ²⁹Investigated on V-down rib containing gap. The literature shows V-ribs discretization has not been done hence the present study has been taken up to study thermo-hydraulic performance of W-discrete roughness. Further effect of rib orientation has also been studied.

3. Experimental Set-up and Procedure Details

The fabrication of experimental set-up along with their designed has been shown in Figure 1. The experimental setup made up of inlet portion, test portion, exit portion and mixing chamber as per³⁰. The experimental setup consists of a duct of length 2040 mm. The size of inlet section maintained at 177 mm, test section 1500 mm

and exit section at 353 mm. The space among the baffles maintained at 87 mm. The air exhausted from the outlet of solar air heater used to be mixed by using baffle plate to maintain bulk mean temperature. The fabrication of electric heater done by using looping of heating wire in combination of parallel and series arrangement on asbestos sheet. An electric heater of dimension same as that of the size of absorber plate is used to maintain constant heat flux on entire surface of artificial roughened sheet up to 1500 W/m². A variable transformer has been provided for continuous power supply or it may be varied if needed.

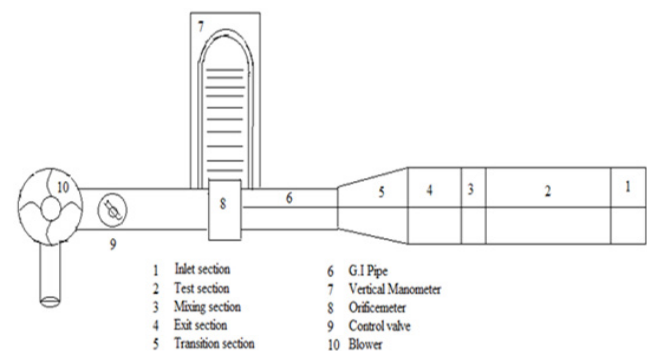


Figure 1. Experimental schematic diagram setup.

A control valve is used beside the orifice plate to change the Reynolds number according to the requirement. A vertical manometer is placed in between exit section of the duct and blower. Heat flux with uniform supply of 900 W/m² is provided on roughened plate. For minimizing losses of heat a glass wool is put at the back side of heater and also a piece of wood of 12 mm thick is provided at the top of heater to prevent heat leakage from top surface. AC power variac is used to control the supply of heat to the roughened plate. The top or upper surface of artificial roughened plate is painted black. The outlet of wooden duct is attached, with a trapezoidal section and a round section transition pieces to G.I pipe of 76 mm inside diameter with assembly of orifice plate. The orifice assembly has a diameter of throat of 38 mm. At the end of pipes a blower is connected. G.I pipes are used to connect blower with the help of flexible pipes. Roughened plate with W-discrete roughness geometry of angle of attack of 45° is shown in Figure 2. At the bottom of 1 mm thickness (20 SWG) GI sheet, roughness is created with the help of copper wire and heating flux was applied on the

upper side. Mass flow rate was calculated with the help of calibrated orifice meter. This orifice meter attached with vertical manometer and flowing air was controlled with the help of control valve used in line. Calibrated thermocouples were used in order to calculate inlet and outlet temperature with better precision. The specification of thermocouple is copper-constantan 0.3 mm (24 SWG) and it is implemented to measure the temperature of flowing air through the duct and also the roughened absorber plate temperature at various locations. The selected value of relative roughness pitch is 10, as per parameter shows in the literature survey.

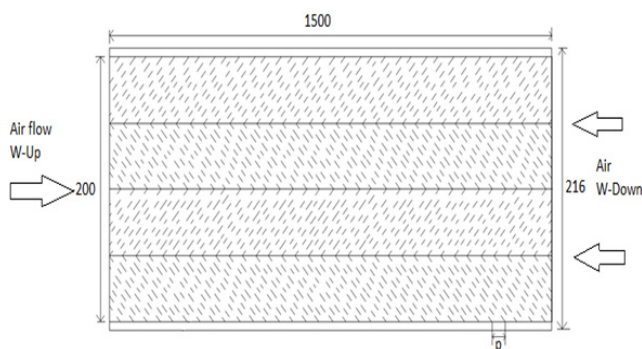


Figure 2. W-discrete ribs.

For every plate 6 reading were taken for different flow rate having Reynolds number range in between 4000 to 14500. All experimental parts and working component of the setup and various corresponding instruments have been inspected for proper working and evaluation process. Validity test as per norms has been done on smooth absorber plate. The smooth plate testing is done with similar operating and geometric condition of duct arrangement and all the result saved for the comparison analysis. For measuring the exit air temperature five thermo-couples are placed in exit section. The plate and air temperature is measured after the steady state condition is reached. Following measurements are taken

- Temperature of entrance air.
- Temperature of the exit air.
- Plate temperature.
- Pressure drop during the flow passing through the test section.
- Mass flow rate of air.

4. Result and Discussion

Validity test:

Modified Dittus Boelter and Modified Blasius equation are the best way to compare smooth duct data to the data obtained from these equations. Modified Blasius equation used for friction factor and for the calculation of Nusselt number the modified Dittus-Boelter equation were implemented.

The comparison analysis of predicted and experimentally performed value of Nusselt number along with friction factor has been shown in Figure. 3 and Figure. 4. As compare to predicted value the average deviation of friction factor is 5.76% and also as compare to predict value the average deviation Nusselt number is 7.96 %.

The Figure 5. shows the variation of Reynolds number on Nusselt number for W-discrete up and W-discrete down rib orientation for angle of attack of 45°. Figure 6. shows variation of Reynolds number on friction factor for different rib orientation.

As seen from Figure 5. Nusselt increases with increase in Reynolds number due to progressive breaking of laminar sub-layer. Also as seen from Figure 6. friction factor decreases as with the increase of Reynolds number pressure drop in duct increases.

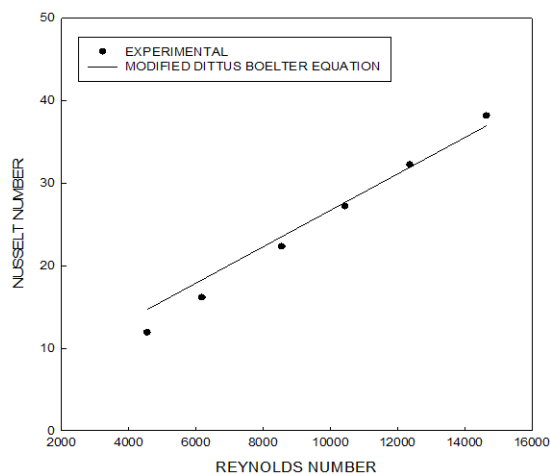


Figure 3. Comparative study between predicted and experimental data of Nusselt number corresponding to smooth duct.

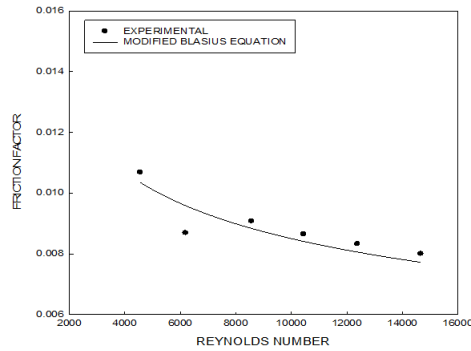


Figure 4. Comparative study between predicted and experimental data of friction factor corresponding to smooth duct.

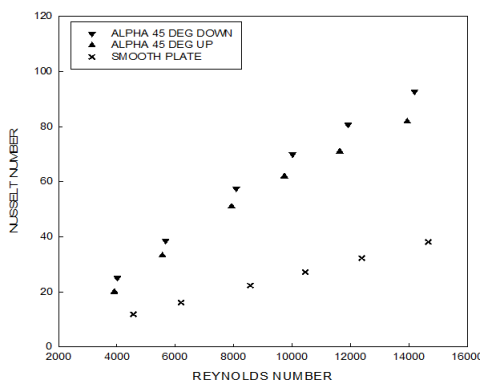


Figure 5. Variation of Reynolds number on Nusselt number with W-Discrete down and W-discrete Up ribs for angle of attack of flow of 45° and relative roughness height of 0.03375.

Maximum increase in Nusselt number is 2.36 times for W-discrete up and 2.60 times for W-discrete down as compare to smooth duct. Maximum increase in friction factor is 1.79 times for W-discrete up and 1.73 times for W-discrete down as compare to smooth duct.

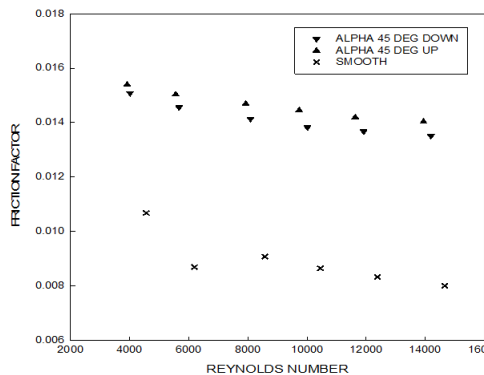


Figure 6. Variation of Reynolds number on friction factor for W-Discrete down and W-discrete Up ribs for angle of attack of flow of 45° and relative roughness height of 0.03375.

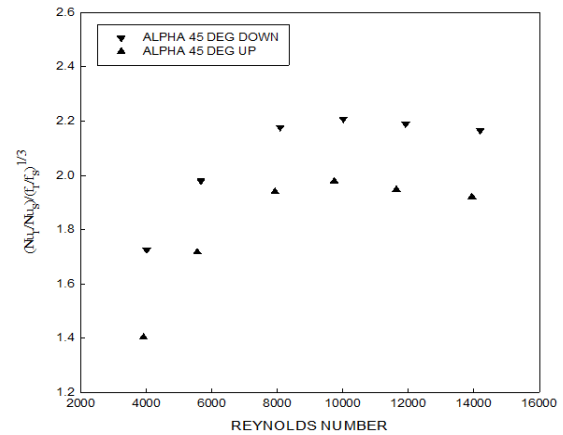


Figure 7. Variation of Reynolds number on Thermo-hydraulic performance parameter for relative roughness height of 0.00375 and for given angle of attack of flow for W-Down and W-Up discrete ribs.

5. Thermo-Hydraulic Performance

For the augmentation of heat transfer rate artificial roughness endorse important action but simultaneously friction factor also act as restricting medium for flowing fluid. For optimising performance selection of proper roughness geometry is major criterion. Duct performance depends upon the combined effect of Nusselt number along with friction factor characteristic simultaneously.³¹ Given the concept of thermo-hydraulic performance parameter defined as $(Nu_r/Nu_s)/(f_r/f_s)^{1/3}$ where Nu_r and Nu_s show Nusselt number of roughened and smooth plate respectively. The Figure 7. shows thermo-hydraulic parameter along with Reynolds number with e/D_h of 0.00375 and for angle of attack of 45° . Investigation shows that W-discrete down ribs perform better inspite of W-discrete up module with consideration of thermo-hydraulic performance.

6. Conclusion

Heat transfer rate is higher in W-discrete down orientation as against W-discrete-up orientation. Also friction factor of W-discrete-up is greater than W-discrete down orientations. Thermo-hydraulic performance evaluated with consideration of heat transfer augmentation and pressure drop reimbursement. Investigation reveals that W-discrete down rib has better performance than W-discrete up orientation.

7. References

- Visagavel K, Srinivasan PSS. Experimental investigation on solar air heater assisted natural ventilation in single-sided ventilated room. *Indian Journal of Science and Technology*. 2010 Jul; 3(7):802–6. DOI: 10.17485/ijst/2010/v3i7/29819.
- Velmurugan P, Ramesh P. Evaluation of thermal performance of wire mesh solar air heater. *Indian Journal of Science and Technology*. 2011 Jan; 4(1):12–4. DOI: 10.17485/ijst/2011/v4i1/29923.
- Lalji MK, Sarviya RM, Bhagoria JL. Heat transfer enhancement in packed bed solar air heater. *Indian Journal of Science and Technology*. 2011 Jul; 4(7):747–9. DOI: 10.17485/ijst/2011/v4i7/30104.
- Lanjewar AM, Bhagoria JL, Sarviya RM. Heat transfer enhancement in solar air heater. *Indian Journal of Science and Technology*. 2010 Aug; 3(8):908–10. DOI: 10.17485/ijst/2010/v3i8/29908.
- Pawar CB, Aharwal KR, Choube A. Heat transfer and fluid flow characteristics of rib-groove roughened solar air heater ducts. *Indian Journal of Science and Technology*. 2009 Nov; 2(11):50–4. DOI: 10.17485/ijst/2009/v2i11/29537.
- Kumar KJJ. Heat transfer analysis of light weight cryogenic tank for space vehical. *Indian Journal of Science and Technology*. 2015 Feb; 8(4):314–9. DOI: 10.17485/ijst/2015/v8i4/62291.
- Karimipour A, Alip-our H, Akbari O, Semiromi DT, Hemmat Esfe M. Studying the effect of indentation on flow parameters slow heat transfer of water-silver nano-fluid with varying volume fraction in a rectangular two-dimensional micro channel. *Indian Journal of Science and Technology*. 2015 Jul; 1–13. DOI: 10.17485/ijst/2015/v38i15/51707.
- Ab Ghani MR, Affa-ndi R, Gan CK, Jano Zanariah SR. The influence of concentrator size, reflective material and solar irradiance on the parabolic dish heat transfer. *Indian Journal of Science and Technology*. 2014 Jan; 7(9):1454–60. DOI: 10.17485/ijst/2014/v7i9/49451.
- Sudhan EPJ, Meenakshi KS. Synthesis of silver nanofluid by a novel one pot method for heat transfer applications. *Indian Journal of Science and Technology*. 2011 Apr; 4(4):417–21. DOI: 10.17485/ijst/2011/v4i4/30013.
- Agarwal Y, Bhagoria JL. Heat transfer characteristics of a copper-nickel multi tube with corrugated copper fins in a cross flow heat exchanger. *Indian Journal of Science and Technology*. 2011 Nov; 4(11):1532–6. DOI: 10.17485/ijst/2011/v4i11/30281.
- Sahoo SN, Panda JP, Dash GC. Hydromagnetic oscillatory flow and heat transfer of a visous liquid past a vertical porous plate in a rotating medium. *Indian Journal of Science and Technology*. 2010 Jul; 3(7). DOI: 10.17485/ijst/2010/v3i7/29821.
- Kim JY, Park TH, Park JB, Choi DS, Kim KS. Experimenal study on the heat transfer performance of rectangular plate-type heat pipe. *Indian Journal of Science and Technology*. 2015 Jan; 8(S1):817–21. DOI: 10.17485/ijst/2015/v8iS1/57750.
- Kalbasi M, Saeedi A. Numerical investigation into the convective heat transfer of CuO nanofluids flowing through a straight tube with uniform heat flux. *Indian Journal of Science and Technology*. 2012 Mar; 5(S3):2455–8. DOI: 10.17485/ijst/2012/v5iS3/30411.
- Kim YC, Cho JU. A study on heat transfer due to cylinder block shape through analysis. *Indian Journal of Science and Technology*. 2015 Apr; 8(S7):590–5. DOI: 10.17485/ijst/2015/v8iS7/70444.
- Edrisi S, Kasiri N, Haghighi M. Modeling of heat transfer effective coefficient of ceramic porous media by self-consistent method. *Indian Journal of Science and Technology*. 2015 May; 8(S9):158–71. DOI: 10.17485/ijst/2015/v8iS9/68556.
- Saini RP, Singal SK. Investigation of thermal performance of solar air heater having roughness element as a combination of inclined and transverse ribs on the absorber plate. *Renewable Energy*. 2008; 33(6):1398–405.
- Gupta D, Solanki SC, Saini JS. Heat and fluid flow in rectangular solar air heater ducts having transverse rib roughness on absorber plates. *Solar Energy*. 1993; 51(1):31–7.
- Saini RP, Saini JS. Heat transfer and friction factor correlation for artificially roughened ducts with expanded metal mesh as roughened element. *Int J Heat Mass Tran*. 1997 Mar; 40(4):973–86.
- Karwa R, Solanki SC, Saini JS. Heat transfer coefficient and friction factor correlations for the transitional flow regimes in rib-roughened rectangular ducts. *International Journal of Heat Transfer*. 1999 May 1; 42(9):1597–615.
- Momin AME, Saini JS, Solanki SC. Heat transfer and friction in solar air heater duct with v-shaped rib roughness on absorber plate. *International Journal of Heat and Mass Transfer*. 2002 Jul; 45(16):3383–96.
- Lanjewar A, Bhagoria JL, Sarviya RM. Heat transfer and friction in solar air heater duct with W-shaped rib roughness on absorber plate. *Energy*. 2011; 36(7):4531–41.
- Hans VS, Saini RP, Saini JS. Heat transfer and friction factor correlation for a solar air heater duct roughened artificially with multiple V-ribs. *Solar Energy*. 2010 Jun; 84(6):898–11.
- Jaurker AR, Saini JS, Gandhi BK. Heat transfer and friction characteristic of rectangular solar air heater duct using rib-grooved artificial roughness. *Solar Energy*. 2006 Aug; 80(8):895–907.
- Layek A, Saini JS, Solanki SC. Heat transfer and friction characteristic for artificial roughened ducts with compound turbulators. *International Journal of Heat and Mass Transfer*. 2007; 50(23-24):4845–54.
- Saini SK, Saini RP. Development of correlation for Nusselt number and friction factor for solar air heater with roughened duct having arc-shaped wire as artificial roughness. *Solar Energy*. 2008 Dec; 82(12):1118–30.
- Lanjewar AM, Bhagoria JL, Agarwal MK. Artificial rough-

- ness in solar air heater and performance evaluation of different orientations for double arc rib roughness. *Renewable and Sustainable Energy Reviews*. 2014; 43:1214–23.
27. Karwa R, Bairwa RD, Jain BP, Karwa N. Experimental study of the effects of rib angle and discretization on heat transfer and friction factor in an asymmetrically heated rectangular duct. *J Enhance Heat Transfer*. 2005; 12(4):343–55.
28. Aharwal KR, Gandhi BK, Saini JS. Experimental investigation on heat transfer enhancement due to gap in an inclined continuous rib arrangement in a rectangular duct solar air heater. *Renew Energy*. 2008 Apr; 33(4):585–96.
29. Singh S, Chander S, Saini JS. Heat transfer and friction factor of discrete V-down rib roughened solar air heater ducts. *Journal of Renewal Sustainable Energy*. 2011; 3(1):013107–17.
30. Duffie JA, Beckman WA. *Solar engineering thermal process*. New York: John Wiley; 1991.
31. Webb RL, Eckert ERG, Goldstein RJ. Heat transfer and friction in tubes with repeated rib roughness. *Int J Heat Mass Transfer*. 1971; 14(4):601–17.