

Prediction of Ground Level Concentrations of NO_x in a Thermal Power Project using ISCST3 Model

S. Anand Kumar Varma^{1*} and K. R. Manjula²

¹Department of Civil Engineering, V. S. B Engineering College, Karur - 639111, Tamil Nadu, India;
manju_sakv@yahoo.co.in

²CSE Department, School of Computing, Sastra University, Thanjavur - 613401, Tamil Nadu, India;
manju_sakvarma@yahoo.co.in

Abstract

Background: Present study deals with the prediction of nitrogen oxides in the vicinity of the Rayalaseema Thermal Power Project, Andhra Pradesh, India. It provides information to the public and the control agencies to efficiently implement the control strategies of the air quality management program. **Methods:** In this prediction, the industrial source complex short-term version 3 (ISCST3) model was used. ISCST3 is the preferred model of USEPA. ISCST3 is a refined dispersion modeling technique using site specific input data. **Findings:** Predictions were made around the power plant with the radius of 10,000 meters; for the period of one year from June 2012 to May 2013. ISCST3 and Golden software surfer version 8 was used to produce Isopleths and 3-Dimensional view of NO_x in the vicinity of the Rayalaseema Thermal Power Project. Similarity beside measurements of Ambient Air Quality Monitoring Stations (AAQMS) was made. Genuine results were found well with measured data. Coefficients of determination (R^2) were found in the range between 0.76 to 0.96. The ISCST3 model can be used for NO_x prediction with good accuracy. **Application and Improvement:** Further forecasting can be carried out in coal fired power stations for using wide ranging parameters, which will have significant impact on human health and environment using ISCST3 modeling technique.

Keywords: Dispersion Model, Ground Level Concentrations, ISCST3, Nitrogen Oxides, Thermal Power Project

1. Introduction

Nitrogen Oxides (NO_x), particularly nitrogen dioxide, are produced from the combustion of fossil fuels under high temperature conditions. Thermal power plants are the major sources of Nitrogen oxides. Higher concentrations of NO_2 damage the leaves of plants, retard the photosynthetic activity and cause chlorosis. NO_2 has irritating effect on mucous membranes; it causes bronchitis and respiratory problems. Higher concentrations of NO_2 cause gum inflammation, internal bleeding, lung cancer, pneumonia and oxygen deficiency⁷. NO_x fades away the number of textile dyes. It produces peroxides with hydrocarbons which combine with ozone and cause crack in the rubber. Oxides of nitrogen are involved in the generation of serious air pollutants such as ozone, PAN and photochemical smog. Hence prediction of nitrogen oxides is the prime requisite in industrial sites

for impact assessment⁹. The Industrial Source Complex - Short Term version 3 (ISCST3) is a steady state, Gaussian based dispersion model⁶ which, can be widely applied to forecast pollutant concentrations. The ISCST3 dispersion model from the United States Environmental Protection Agency was intended to sustain the EPA's authoritarian modeling options⁸.

2. Study Area

The Rayalaseema Thermal Power Project Stage-I (420 MW) comprises of two units each one established with 210MW power. The Rayalaseema Thermal Power Project Stage-II (420 MW) comprising 2 Units of 210 MW each. The Rayalaseema Thermal Power Project Stage-III (210 MW) comprising 1 Unit. Stage-IV (600 MW) works are under progress.

* Author for correspondence

The Project is situated in Chennai-Guntakal Broad gauge line. The project site is at 180 m above MSL and it lies on latitude of $14^\circ - 42' - 30''\text{N}$ and longitude of $78^\circ - 28'$ E. The project is located in an area of 1650 Hectares. The site for power project at Kalamala is located near by the towns Yerraguntla, Produtur and Muddanur. The area is rural, the total regional population is more than 4, 00,000 residing within a radius of 10 Km. The location map of RTPP is shown in Figure 1.

Thermal power plant is a major source of local pollution and health damages. The major pollutants affecting the site are suspended particulate matter, sulfur dioxide and nitrogen oxides. Current air quality forecasting efforts focus on predicting nitrogen oxides (NO_x) using ISCST3 model³.

3. Application of ISCST3 Model for Rayalaseema Thermal Power Project

3.1 Input Data

The application of ISCST3 model in the present study

needs input data from emission sources at the RTPP site and site-specific meteorological data. The input data that explain both the emission source and meteorological conditions give total data which can be used to run the ISCST model and thus reproduce the ground level concentrations of nitrogen oxides (NO_x) from stationary source of a thermal power plant⁴. The information of emission source that requirements to be input into the model is limited to the physical stack dimensions i.e., stack height, stack location, internal diameter of the stack, as well as the velocity and temperature of the flue gas, and the nitrogen oxides emission rates¹. In addition the model needs the site-specific meteorological data as input data¹¹. The local meteorological data that was required to be input into the model were limited to the Julian day, wind direction, wind speed, mixing height, ambient atmospheric temperature and the Pasquill stability class¹². The data were collected from India meteorological department and from the web site www.metchec.com. The ISCST3 model requires meteorological data to be used on an hourly basis format. Typical meteorological file developed ISCST3 format is shown in Figure 2.

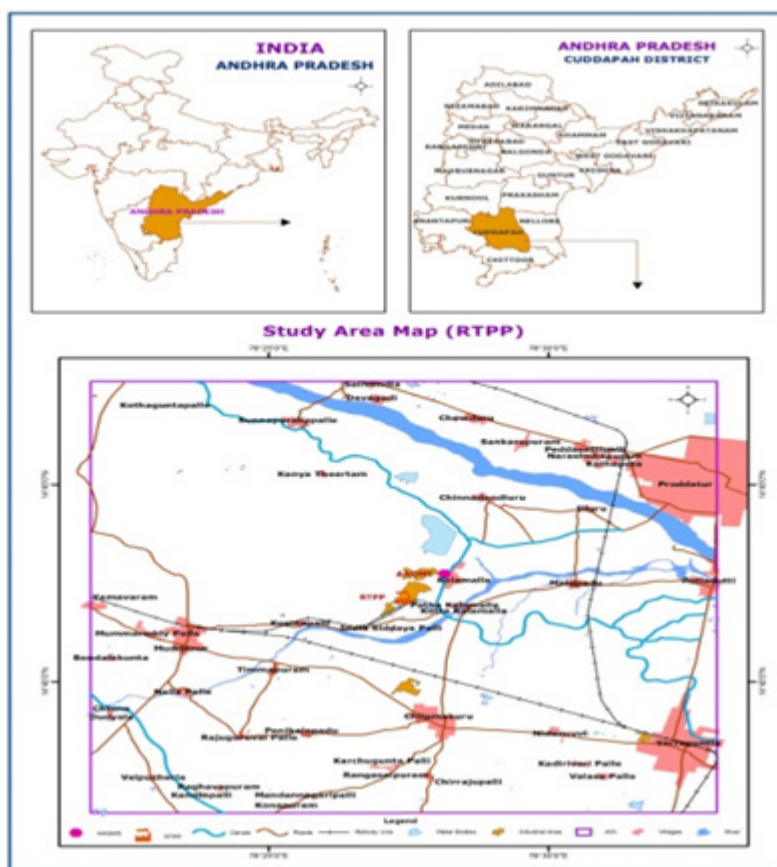


Figure 1. RTPP location map.

The screenshot shows a Notepad window with a file named 'June - 2012 - Notepad'. The file contains a large table of data, likely meteorological or environmental, organized in a grid-like structure. The data is presented in multiple columns, with some columns containing numerical values and others containing text or symbols. The table is dense and spans many rows, indicating a large dataset.

Figure 2. Typical meteorological file.

3.2 Modeling Process

The model was arranged to generate the pollutant ground level concentration ensuing from all the five stacks at all the grids enclosed by the receptor location. The model was then run by adding the steady state concentration contributions from every source at each receptor point in turn. The calculations were based on maximum 8 hour average concentrations, month wise from June 2012 to May 2013. It was implicit that the quantity of pollutant produced by every source was preserved, that is the model implicit that there would be no loss of pollutant between source and receptor. Other assumptions of the ISCST3 model include the emission conditions are steady state; emission inventories are not time dependent; emission sources will not interfere with each other; loss of pollutant due to atmospheric reactions, absorption are not considered; and the influence of different structures situated in the surrounding area of pollutant releasing sources has insignificant impact². The typical ISCST3 program¹³ used to calculate the Ground level concentration is shown below:

3.3 Typical ISCST3 Input File

The typical input file for the Nitrogen Oxides (NO_x) is represented in the Figure 3.

3.4 Model Output

The ISCST3 model output is provided with coordinates and respective concentrations. The Study area is 10,000 m², each receptor grid cart is 500 m², and total numbers of receptor points are 41×41 = 1681. Ground level concentrations of every receptor point are obtained from the model output file, which are represented in Figure 4.

4. Spatial Distributions of Pollutant Concentration Levels

The isopleths given in Figures 5(a) to 16(b) were plotted using Golden Software Surfer version 8. In ISCST3 model these concentration contours are more significant in finding the spatial allocation of nitrogen oxides (NO_x) over the Modeled region⁵. Certainly the contours of concentration could be used for the following determinations:

- It is feasible to decide the spatial and temporal areas for which the CPCB/WHO standard value of pollutant concentration level is reached or exceeded.
- By regulating the pollutant emission rates from definite sources, it is likely to use the ISCST model to find out those sources that have the maximum effect

```

CO STARTING
TITLEONE SPATIAL POLLUTION ROSE (SPR ) DISPERSION PATTERN
MODELORT CONC. RURAL NOSTD MSGPRO
AVERTIME 8 PERIOD
POLLUTID NOx
RUNORNOT RUN
EVENTFIL EVENTEXP.INP
ERRORFIL ERRORS.OUT
CO FINISHED

SO STARTING
** Source Location Cards:
** SRCID SRCTYP XS YS ZS
LOCATION 1 POINT 0.0000 0.0000 .0000
LOCATION 2 POINT 70.0000 0.0000 .0000
LOCATION 3 POINT 71.0000 0.0000 .0000
LOCATION 4 POINT 140.0000 0.0000 .0000
LOCATION 5 POINT 141.0000 0.0000 .0000
** Source Parameter Cards:
** POINT: SRCID QS HS TS VS DS
** VOLUME: SRCID QS HS SVINIT SZINIT
** AREA: SRCID QS HS XINIT
SRCPARAM 1 13.53000 220.0000 413.0000 28.700 4.0000
SRCPARAM 2 14.40000 220.0000 413.0000 28.700 4.0000
SRCPARAM 3 14.67000 220.0000 413.0000 28.700 4.0000
SRCPARAM 4 13.60000 220.0000 413.0000 28.700 4.0000
SRCPARAM 5 13.10000 220.0000 413.0000 28.700 4.0000
** EMISUNIT .100000E+07 (GRAMS/SEC) (MICROGRAMS/CUBIC-METER)
SO FINISHED

RE STARTING
GRIDCART CAR STA
GRIDCART CAR XYINC -10000.0 41 0500.0 -10000.0 41 0500.0
GRIDCART CAR END
RE FINISHED

ME STARTING
INPUTFIL JAN.MET
ANEMHGHT 10 METERS
WDROTATE 180
SURFDATA 24232 2013 RTPPKADAPA
UAIRDATA 24232 2013 RTPPKADAPA
ME FINISHED

OU STARTING
ALLAVE FIRST-SECOND
MAXTABLE ALLAVE 50
MAXIFILE 8 ALL 10.0 MAXIALL.FIL 25
POSTFILE 8 ALL PLOT VINOCO.FIL 22
PLOTFILE 8 ALL FIRST DECNOX.PLT
OU FINISHED
    
```

Figure 3. Input file for NO_x .

* ISCST3 (02035): SPATIAL POLLUTION ROSE (SPR) DISPERSION PATTERN
 * MODELING OPTIONS USED:
 * CONC RURAL FLAT NOSTD
 * MSGPRO
 * PLOT FILE OF HIGH 1ST HIGH 8-HR VALUES FOR SOURCE GROUP: ALL
 * FOR A TOTAL OF 1681 RECEPTORS.
 * FORMAT: (3 (1X,F13.5), 1X,F9.2,3X,A5,2X,A5,2X,A4,6X,A5)
 * X Y AVERAGE CONC ZELEV AVE GRP NIVAL

NET ID	X	Y	AVERAGE CONC	ZELEV	AVE	GRP	NIVAL
-10000.00000	-10000.00000	0.00000	0.00	8-HR	ALL	1ST	CAR
-9500.00000	-10000.00000	0.00000	0.00	8-HR	ALL	1ST	CAR
-9000.00000	-10000.00000	0.00000	0.00	8-HR	ALL	1ST	CAR
-8500.00000	-10000.00000	0.00000	0.00	8-HR	ALL	1ST	CAR
-8000.00000	-10000.00000	0.00000	0.00	8-HR	ALL	1ST	CAR
-7500.00000	-10000.00000	0.00000	0.00	8-HR	ALL	1ST	CAR
-7000.00000	-10000.00000	0.00000	0.00	8-HR	ALL	1ST	CAR
-6500.00000	-10000.00000	0.00000	0.00	8-HR	ALL	1ST	CAR
-6000.00000	-10000.00000	0.00000	0.00	8-HR	ALL	1ST	CAR
-5500.00000	-10000.00000	0.00000	0.00	8-HR	ALL	1ST	CAR
-5000.00000	-10000.00000	0.00000	0.00	8-HR	ALL	1ST	CAR
-4500.00000	-10000.00000	0.00000	0.00	8-HR	ALL	1ST	CAR
-4000.00000	-10000.00000	0.00000	0.00	8-HR	ALL	1ST	CAR
-3500.00000	-10000.00000	0.00000	0.00	8-HR	ALL	1ST	CAR
-3000.00000	-10000.00000	0.00000	0.00	8-HR	ALL	1ST	CAR
-2500.00000	-10000.00000	0.00000	0.00	8-HR	ALL	1ST	CAR
-2000.00000	-10000.00000	0.00000	0.00	8-HR	ALL	1ST	CAR
-1500.00000	-10000.00000	0.00000	0.00	8-HR	ALL	1ST	CAR
-1000.00000	-10000.00000	0.00000	0.00	8-HR	ALL	1ST	CAR
-500.00000	-10000.00000	0.00000	0.00	8-HR	ALL	1ST	CAR
0.00000	-10000.00000	0.00000	0.00	8-HR	ALL	1ST	CAR
500.00000	-10000.00000	0.00022	0.00	8-HR	ALL	1ST	CAR
1000.00000	-10000.00000	0.00153	0.00	8-HR	ALL	1ST	CAR
1500.00000	-10000.00000	0.00790	0.00	8-HR	ALL	1ST	CAR
2000.00000	-10000.00000	0.03168	0.00	8-HR	ALL	1ST	CAR
2500.00000	-10000.00000	0.10218	0.00	8-HR	ALL	1ST	CAR
3000.00000	-10000.00000	0.27317	0.00	8-HR	ALL	1ST	CAR

Figure 4. Model output.

in terms of air quality troubles in the highly sensitive locations of a region.

- It is feasible to study the best possible means of regulating pollutant emissions from the all major sources.
- The model can be applied to recommend the power project of the maximum emissions that could be tolerated without beyond the WHO standards when steady state meteorological conditions are predicted.
- The model can be employed to understand future scenarios that comprise the impacts of growing energy consumption per-capita, of increasing populations and if new power plant establishments, in addition to their most favorable setting².

5. Validation of ISCST3

Andhra Pradesh State Pollution Control Board (APPCB) established four Ambient Air Quality Monitoring Stations around the emission source point of the Rayalaseema Thermal Power Project. The coordinates of the monitoring stations are identified from the grid map; details were specified in the Table 1.

Modeled output values are collected from the output files of the ISCST3 model; these values are not included with the background concentrations of the RTPP site. With reference to Environmental Impact Assessment report of RTPP site, a background concentration of NO_x is $17 \mu\text{g}/\text{m}^3$ ¹⁰. Predicted (P) values can be produced by

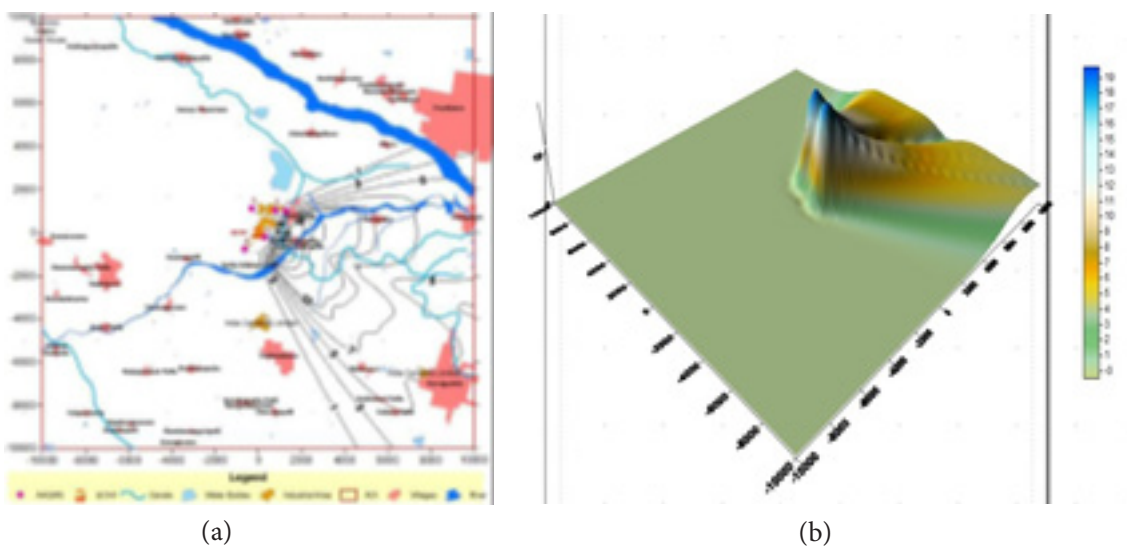


Figure 5. (a) Isopleths of NO_x in the vicinity of RTPP June 2012. (b) 3-Dimensional view of NO_x dispersion in the vicinity of RTPP June 2012.

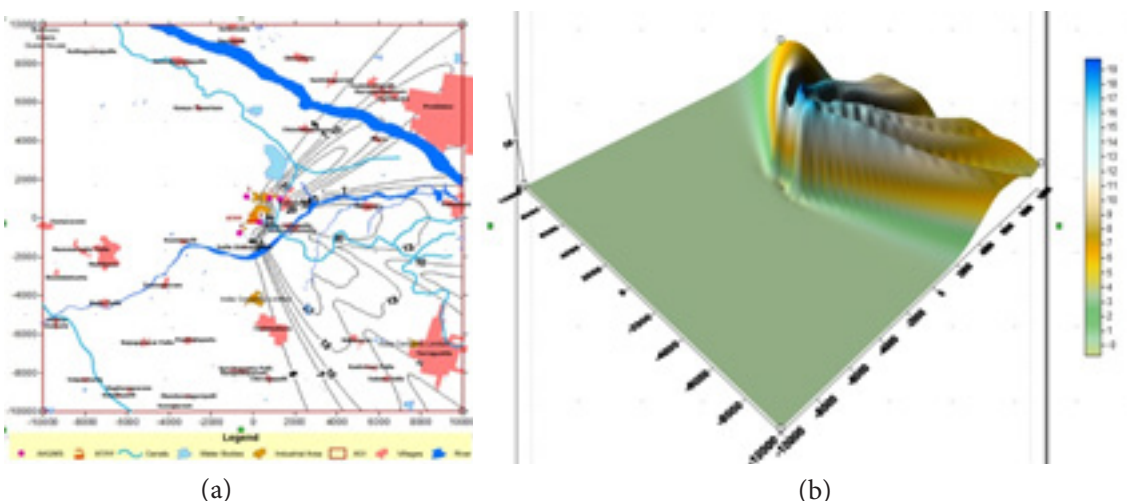


Figure 6. (a) Isopleths of NO_x in the vicinity of RTPP July 2012. (b) 3-Dimensional view of NO_x dispersion in the vicinity of RTPP July 2012.

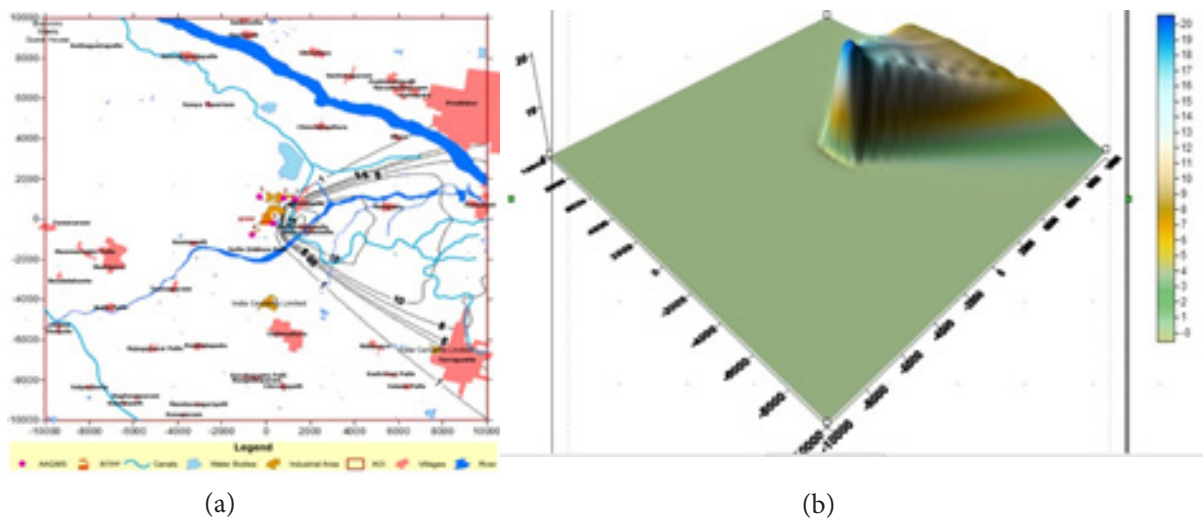


Figure 7. (a) Isopleths of NO_x in the vicinity of RTPP August 2012. (b) 3-Dimensional view of NO_x dispersion in the vicinity of RTPP August 2012.

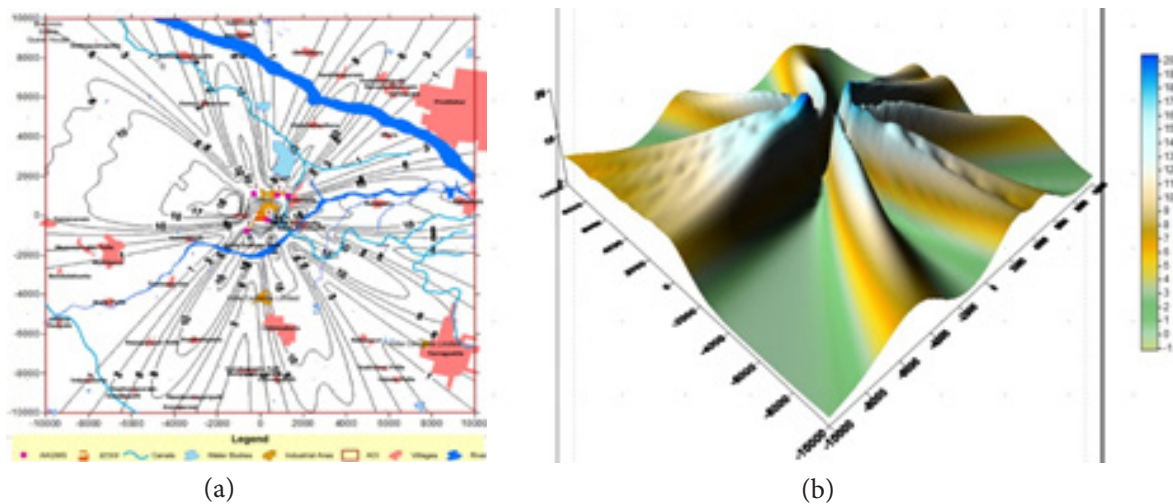


Figure 8. (a) Isopleths of NO_x in the vicinity of RTPP September 2012. (b) 3-Dimensional view of NO_x dispersion in the vicinity of RTPP September 2012.

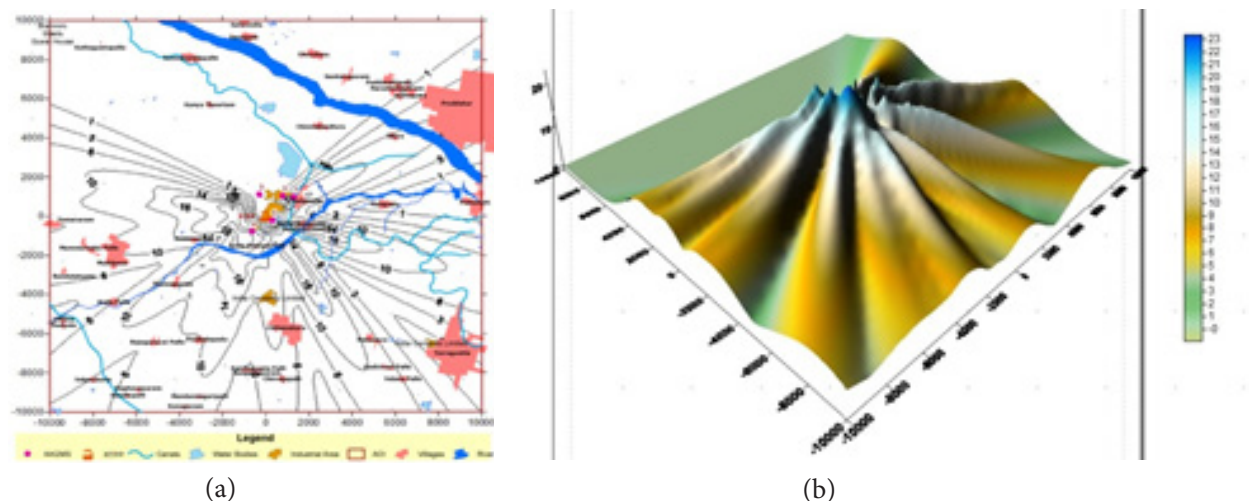


Figure 9. (a) Isopleths of NO_x in the vicinity of RTPP October 2012. (b) 3-Dimensional view of NO_x dispersion in the vicinity of RTPP October 2012.

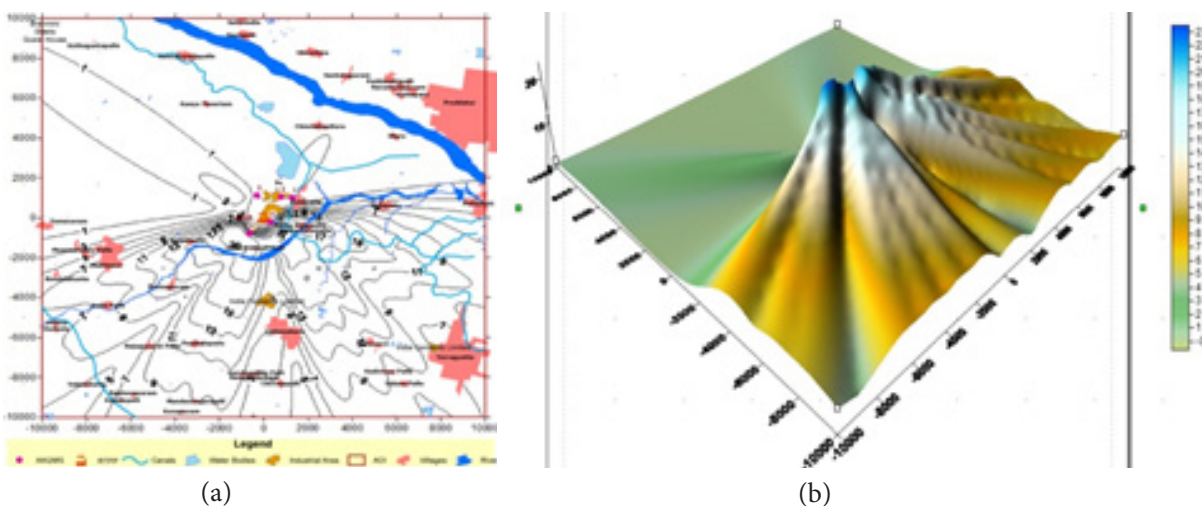


Figure 10. (a) Isopleths of NO_x in the vicinity of RTPP November 2012. (b) 3-Dimensional view of NO_x dispersion in the vicinity of RTPP November 2012.

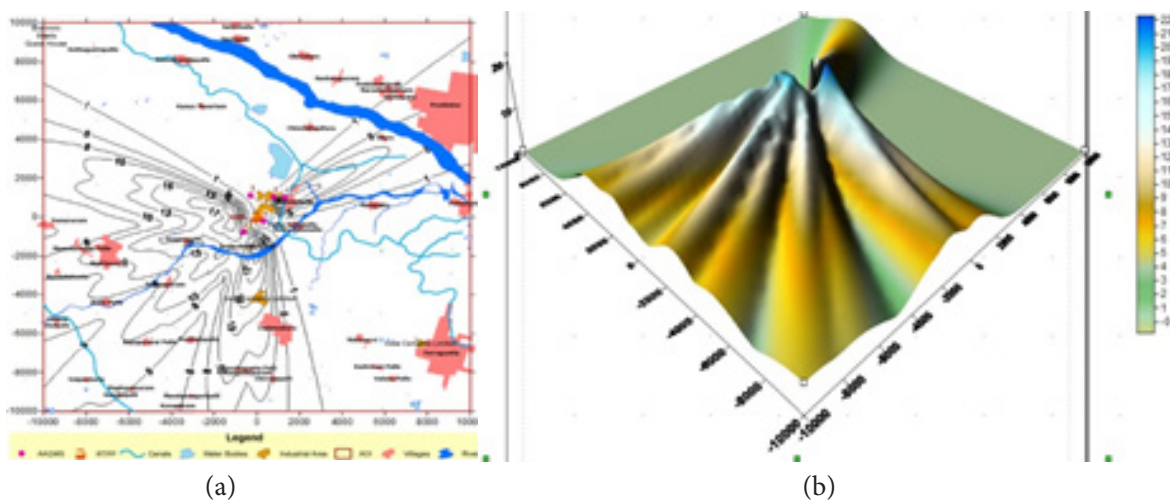


Figure 11. (a) Isopleths of NO_x in the vicinity of RTPP December 2012. (b) 3-Dimensional view of NO_x dispersion in the vicinity of RTPP December 2012.

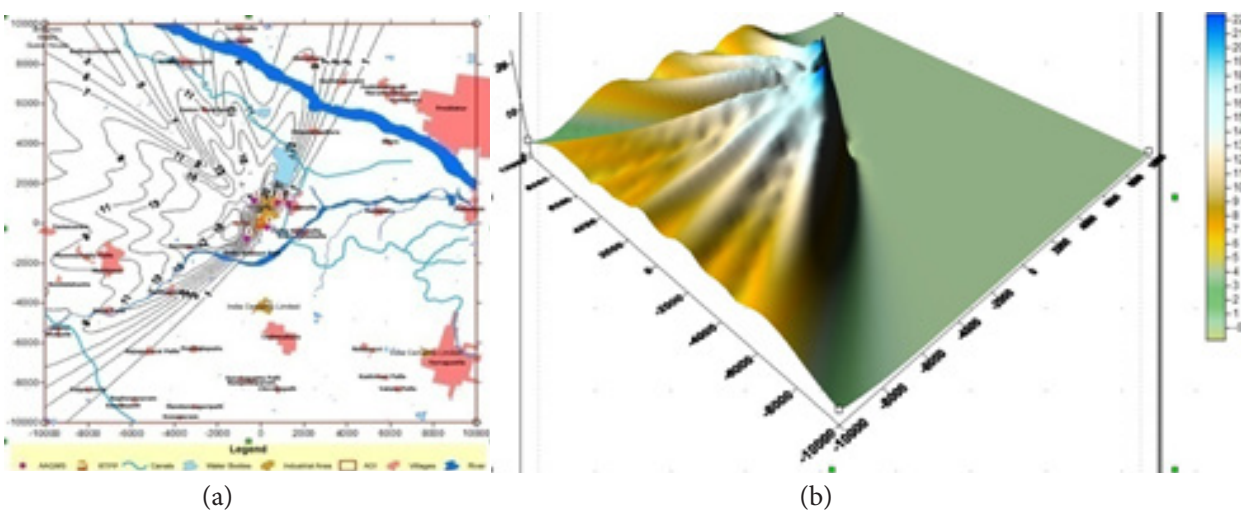


Figure 12. (a) Isopleths of NO_x in the vicinity of RTPP January 2013. (b) 3-Dimensional view of NO_x dispersion in the vicinity of RTPP January 2013.

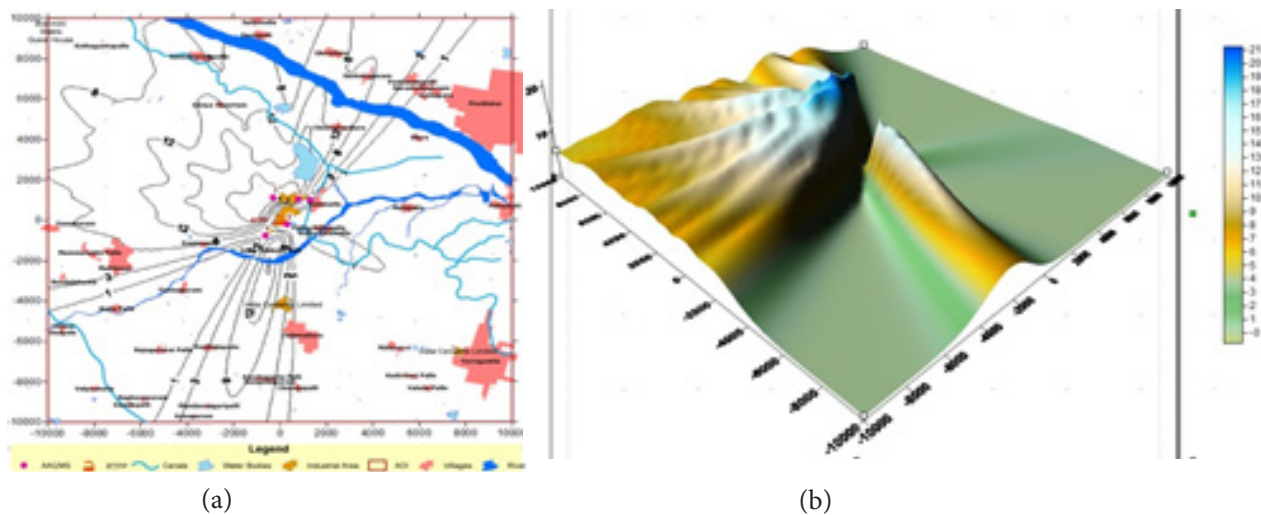


Figure 13. (a) Isopleths of NO_x in the vicinity of RTPP February 2013. (b) 3-Dimensional view of NO_x dispersion in the vicinity of RTPP February 2013.

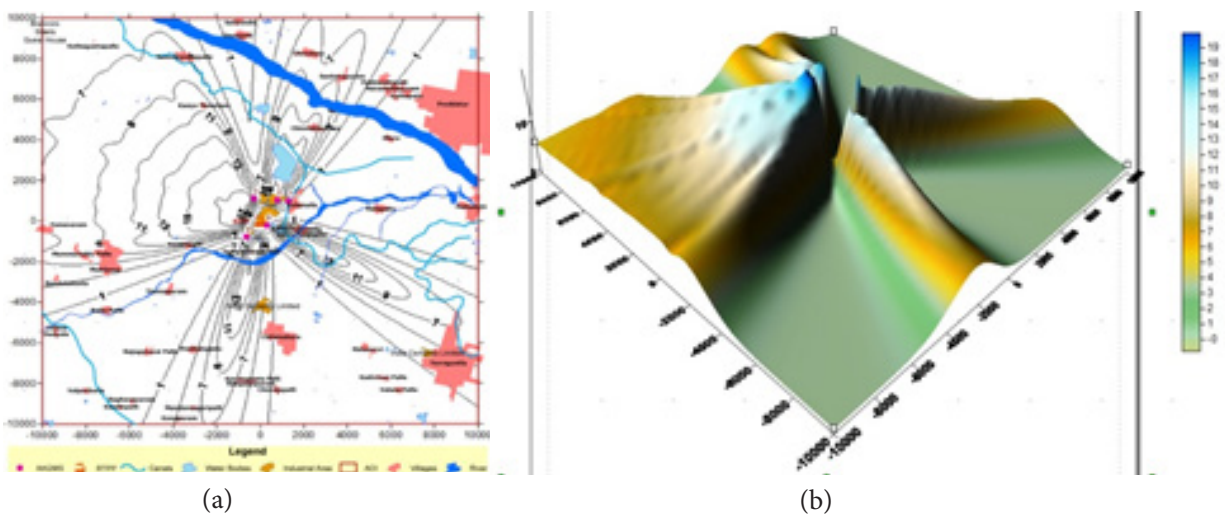


Figure 14. (a) Isopleths of NO_x in the vicinity of RTPP March 2013. (b) 3-Dimensional view of NO_x dispersion in the vicinity of RTPP March 2013.

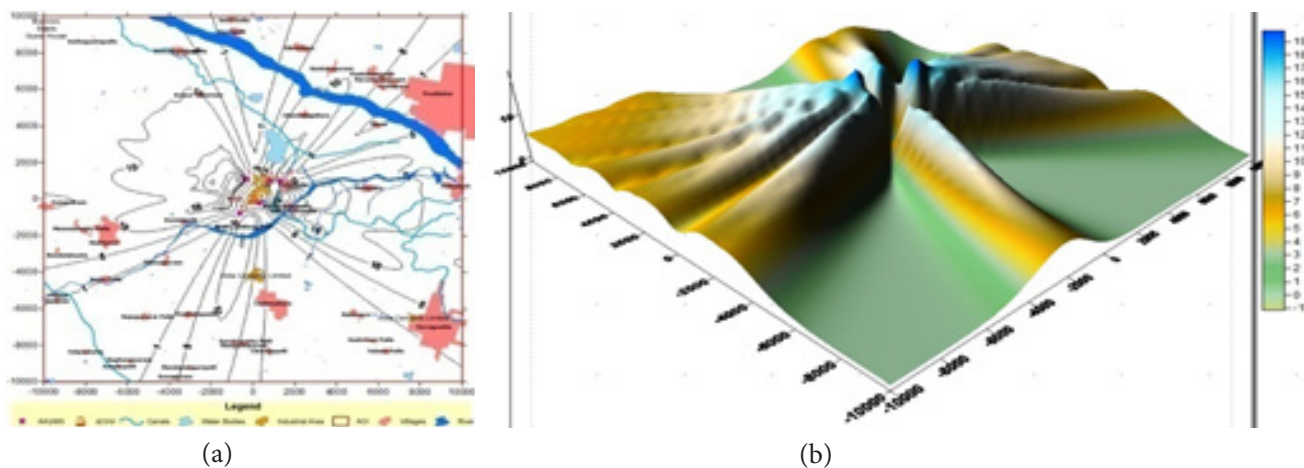


Figure 15. (a) Isopleths of NO_x in the vicinity of RTPP April 2013. (b) 3-Dimensional view of NO_x dispersion in the vicinity of RTPP April 2013.

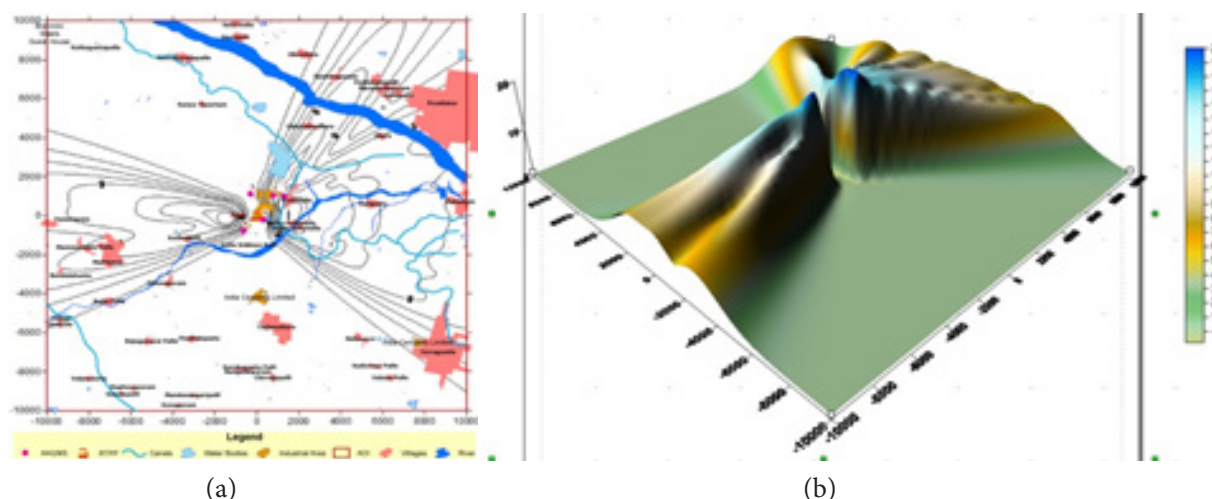


Figure 16. (a) Isopleths of NO_x in the vicinity of RTPP May 2013. (b) 3-Dimensional view of NO_x dispersion in the vicinity of RTPP May 2013.

Table 1. Details of source and monitoring stations in the study area

Source/Monitoring Station	Location	Latitude	Longitude	Coordinates	
				X	Y
Source point	----	14.7022	78.4564	0	0
AAQMS-1	Kalamala police station	14.7114	78.4690	1500	1000
AAQMS-2	Project hostel	14.7119	78.4642	1000	1000
AAQMS-3	Project guest house	14.7125	78.4542	-1000	1000
AAQMS-4	Weigh bridge	14.6954	78.4510	-1000	-1000
AAQMS-5	TXR Office	14.7005	78.4598	500	-500

Table 2. Predicted and measured concentrations of NO_x

Month and year	Receptor points									
	AAQMS-1 (Kalamala Village Police Station)		AAQMS-2 (Project Hostel)		AAQMS-3 (Project Guest House)		AAQMS-4 (Weigh Bridge)		AAQMS-5 (TXR Office)	
	P	M	P	M	P	M	P	M	P	O
June-2012	22	--	18	21	17	20	17	22	17	25
July-2012	34	--	34	28	17	26	17	21	18	26
August-2012	21	--	18	21	17	22	17	22	17	21
September-2012	21	24	33	33	37	28	24	25	17	25
October-2012	31	37	23	25	19	21	41	37	17	25
November-2012	18	20	18	25	21	25	41	39	30	21
December-2012	31	33	23	24	21	22	35	35	17	22
January-2013	17	20	19	21	34	37	33	37	17	23
February-2013	18	20	26	23	35	35	17	20	17	21
March-2013	18	21	26	26	35	34	17	21	17	21
April-2013	22	28	34	29	35	40	19	22	17	25
May-2013	34	38	34	32	17	20	19	26	17	37

Table 3. Statistical performance measures of ISCST3 model

Parameter	Monitoring station	R ²	Inference
NO _x	AAQMS-1	0.96	Strong positive correlation
	AAQMS-2	0.77	Strong positive correlation
	AAQMS-3	0.76	Strong positive correlation
	AAQMS-4	0.94	Strong positive correlation
	AAQMS-5	0.05	Weak correlation

adding the background concentrations to the modeled output concentrations¹¹. APPCB provided the Measured (M) values from monitoring stations for the period of June-2012 to May-2013. Predicted and measured concentrations of NO_x are presented in the Table 2.

The coefficient of determination, R², is calculated for predicting concentrations from ISCST3 and measured values from all the Ambient Air Quality Monitoring Stations⁶. For the best curve fit R² must be 1. Table 3 provides statistical performance measure of ISCST3 model.

6. Conclusions

This work represents the replication of nitrogen oxide dispersion from Rayalaseema Thermal Power Plant, and assessment between the predicted and measured concentrations at the RTPP site. Both measured and predicted data incorporated monthly NO_x concentrations from June 2012 to May 2013. For all Ambient Air Quality Monitoring Stations, the predicted NO_x concentrations were found to agree quantitatively well with the measured data. Our result represented the ISCST3 model can be operated for the dispersion of NO_x concentration prediction with reasonable precision. This model can be operated for the prediction of other primary pollutants from any Thermal Power Plant to its vicinity.

7. Acknowledgments

The authors would like to give special thanks to India Meteorological Department (IMD) and AAQMS for providing meteorological data and monitored pollutant data for the study.

8. References

1. Tplesca A. Power losses and thermal analysis of power rectifiers. Indian Journal Of Science and Technology. 2013 Jul; 6(7).
2. Andretta M, Leonzio B, Luciali P, Righi S. Application of the ISCST3 model to an industrial area: Comparison between predicted and observed concentrations. WIT Transactions on Ecology and the Environment. WIT Press; 2006.
3. Bandyopadhyay A. Dispersion modeling in assessing air quality of industrial projects under the Indian regulatory regime. International Journal of Energy and Environment. 2010; 1(1):97–112.
4. Bandyopadhyay A. Prediction of ground level concentration of sulfur dioxide using ISCST3 model in the Mangalore industrial region of India. Clean Technologies and Environmental Policy. 2009 Jun; 11(2):173–88. Springer. Co article 10.1007 2 s1008-008-0188.
5. Derwent D. Evaluating the performance of air quality models issue; 2010 Jun. p. 3.
6. Jawad TS, Isakov VI, Jaso C. Air quality modeling of hazardous pollutants: Current status and future directions. Journal of the Air and Waste Management. 2006 May; 56(5):547–58.
7. Jeremy C. Air Pollution. 1st ed. UK: Spon Press; 2002. ISBN: 0-415-25565-1.
8. Khamsimak P, Koonaphadeelert S, Tippayawong N. Dispersion modeling of SO₂ emissions from a lignite fired thermal power plant uses CALPUFF. Energy and Environment Research. 2012; 2(2). ISSN: 1927-0569. E-ISSN 1927-0577.
9. Krishna RTVBPS, Wate SR. Air quality modeling in environmental impact assessment studies of different sectors; 2013 Mar. p. 22.
10. Sastry CA. Environmental impact assessment report of RTPP; 1993.
11. Wahab SAA. Evaluation of the industrial source complex short-term model: Dispersion over terrain. Journal of the Air and Waste Management Association. 2004 Apr; 54(4):396–408.
12. Wahab SAA. Modeling of Nitrogen Oxides (NO_x) concentrations resulting from ships at berth. Journal of Environmental Science and Health Part A. 2008 Nov 5; 43(14):1706–16.
13. Wahab SAA. SO₂ dispersion and monthly evaluation of the industrial source complex short-term (ISCST3) model at Mina Al-Fahal refinery, Sultanate of Oman. Environmental Management. 2003 Mar; 31(2):276–91.